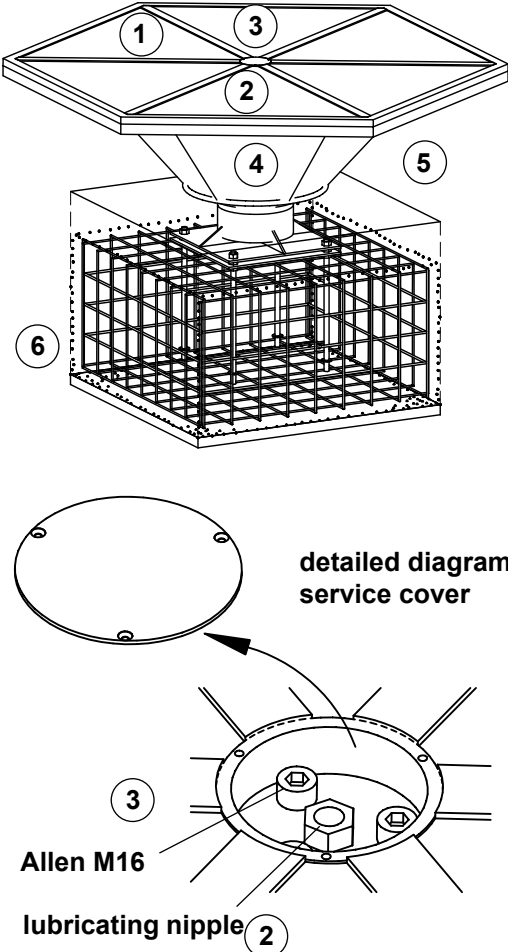


<h1>Instructions for wear checks of play equipment</h1>	<p>The equipment must be checked for correct operation and safety, especially the points listed below:</p>	<p>Proof of maintenance</p>	
<p>Playground.....</p> <p>Date of installation</p> <p>Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.</p> <p>Intervals for maintenance work and checks generally depend on</p> <ul style="list-style-type: none"> - the location - the usage - the frequency of use - possible vandalism <p>For more details see also "General instructions for maintenance of playgrounds".</p> <p>Large Balancing Disc Order No. 10.73200 Ø 2,40 m Order No. 10.73300 Ø 3,40 m</p>  <p>detailed diagram service cover</p> <p>Allen M16</p> <p>lubricating nipple</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Wooden parts </div> <ol style="list-style-type: none"> 1. Check the surface sealing, if necessary, treat damaged areas with wood protection wax (www.complex-farben.eu). <input type="checkbox"/> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Mechanical parts </div> <ol style="list-style-type: none"> 2. Check that the equipment rocks freely without squeaking noises or noise from the bearing, or similar. Remove service cover in order to grease the bearing, if required. <input type="checkbox"/> 3. Check that fastening bolts (Allen M16) underneath the service cover are tight, secure using a high-strength thread locker (Loctite 2701) if necessary. <input type="checkbox"/> 4. Check the condition of the crush protection and dish, there should not be any objects between them; if necessary, retighten the screws or adjust the crush protection; the gap between the crush protection and dish must not exceed 8 mm. <input type="checkbox"/> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Stainless steel </div> <ol style="list-style-type: none"> 5. Clean with stainless steel polish spray (www.kim-tec.de) with a clean cloth, repair damaged areas (stone chips) (danger of injury). <input type="checkbox"/> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Structural stability </div> <ol style="list-style-type: none"> 6. Check the stability of the foundation frame while stationary by rocking on one side and, if necessary, retighten the screws; check fastening parts on the foundation frame for corrosion once a year. <input type="checkbox"/> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Repair not carried out, it is still possible to play on equipment </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Repair not carried out, equipment is taken out of action </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> All work carried out, everything is in order </div> <div style="border: 1px solid black; padding: 5px;"> Maintenance carried out by: Date </div>	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">Special notes, e.g. for repairs</p>	
Repair not carried out, it is still possible to play on equipment	<input type="checkbox"/>		
Repair not carried out, equipment is taken out of action	<input type="checkbox"/>		
All work carried out, everything is in order	<input type="checkbox"/>		
Maintenance carried out by: Date			