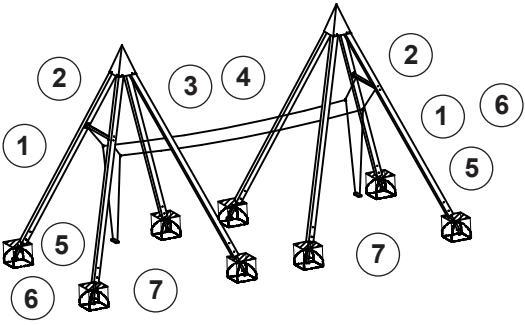


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground..... Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - the location - the usage - the frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Partner Swing Pyramid Order No. 10.93000 	Wooden parts 1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐ 2. Check that all wood connections are tight, retighten if necessary. Re-galvanise protruding threads using galvanising spray if necessary. ☐ Swing suspension 3. Check that ropes, chains and seats are securely connected or linked. ☐ 4. Check ropes and chains for wear and tear, replace if necessary. ☐ 5. Check swing seats for damage. Replace if metal parts are exposed. ☐ 6. Check the swing seats for a ground clearance of 40 cm. ☐ Structural stability 7. Uncover the foundation once a year in order to check for rot or corrosion. ☐	Special notes, e.g. for repairs	
	Repair not carried out, it is still possible to play on equipment		☐
	Repair not carried out, equipment is taken out of action		☐
	All work carried out, everything is in order		☐
	Maintenance carried out by: Date		