



Photo © Daniel Perales



Photo © Paul Upward

### Play value

A large number of combination equipment gives the planner the opportunity to make playgrounds versatile and interesting. The Slide is an example of this.

### Fundamental characteristics

- Unique and original
- Appealing design
- Incentive for playing: experiencing height, role-playing games
- Movement: climbing, sliding

### Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Order No. 3.19210 Slide




Order No. 3.19200 Slide

### Note on installation

Avoid orientation of the slide to the south (heating up of material).

### Slides for attachment to Huts



3.19200




3.19210




3.19220

**Order No. 3.19200**  
**Slide**  
**for attachment to Huts 1.00 m**


Safety distance →  
 Device dimensions —●—  
 Functional distance —|—

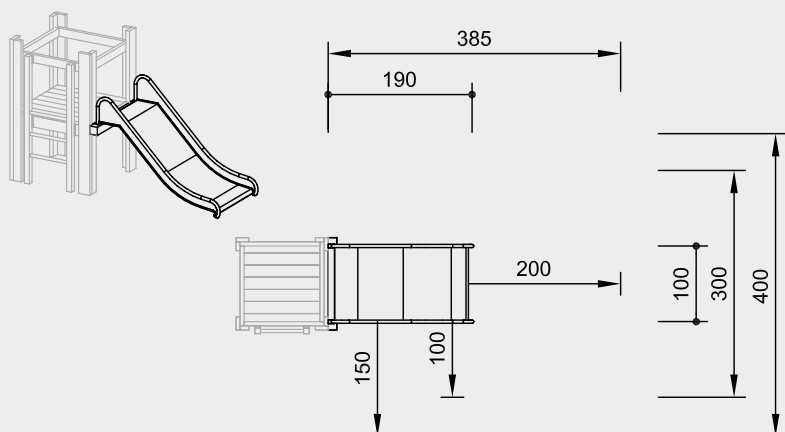

**Order No. 3.19210**  
**Slide**  
**for attachment to Huts 1.50 m**

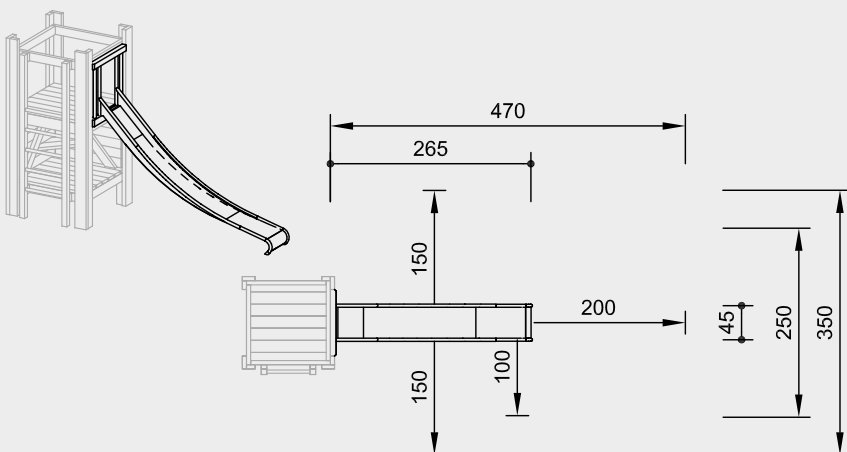

**Order No. 3.19220**  
**Slide**  
**for attachment to Huts 1.00 m**

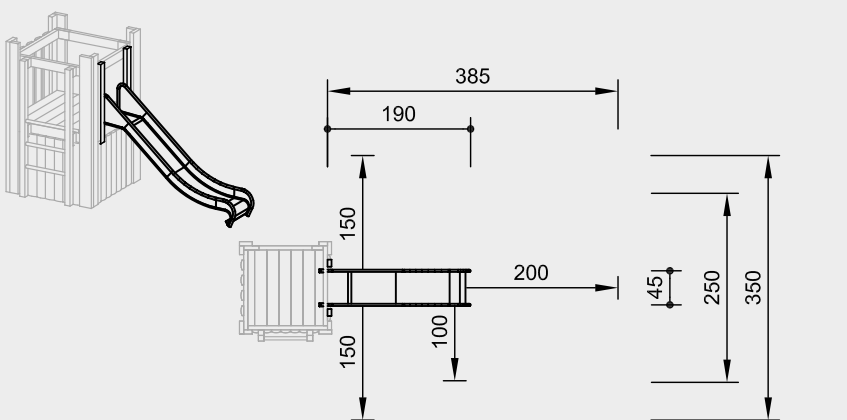

Scale 1:100

Safety check according to DIN EN 1176



3.19200



3.19210



3.19220

**Technical information**

Slides made of stainless steel,  
 glass bead blasted  
 Handrail tube Ø 42 mm  
 Ground anchor made of oak heartwood

**Core-free**

Sawn-timbers core-free, thus decreasing  
 occurrences of cracking and undesired  
 changes in shape



**Order No. 3.19210**

**One-piece construction**

Total construction of the slide made of  
 2 mm stainless steel, drawn in box form,  
 surface glass bead blasted, without  
 welding seam between sliding surface  
 and side cheek



**For more detailed explanation of the  
 quality characteristics see price list.**

**Order No. 3.19200**

Thickness of sides 2 mm  
 Thickness of sliding surface 3 mm

**Order No. 3.19220**

Thickness of sides 2 mm  
 Thickness of sliding surface 2 mm

**Dimensions**

(small deviations possible)

**Order No. 3.19200**

Installation height 1.00 m  
 Width 1.00 m  
 Weight 65 kg

**Order No. 3.19210**

Installation height 1.50 m  
 Width 0.45 m  
 Weight 53 kg

**Order No. 3.19220**

Installation height 1.00 m  
 Width 0.45 m  
 Weight 45 kg

**Components**

**Order No. 3.19200**

1 Slide with ground anchor  
 1 Slide support

**Order No. 3.19210 / 3.19220**

1 Slide with ground anchor  
 1 Support frame

**Installation information**

Surfacing requirements  
 corresponding to a fall height of  
**Order No. 3.19200 / 3.19220** ≤ 1.00 m  
**Order No. 3.19210** ≤ 1.50 m  
 (please refer to price list for more  
 detailed information)

Foundations  
 Excavation depth  
 for ground anchor 55 cm

**Attention:**

**Exact measurements may vary;  
 for all installation dimensions refer  
 to current assembly instructions.**  
 Technical changes reserved.