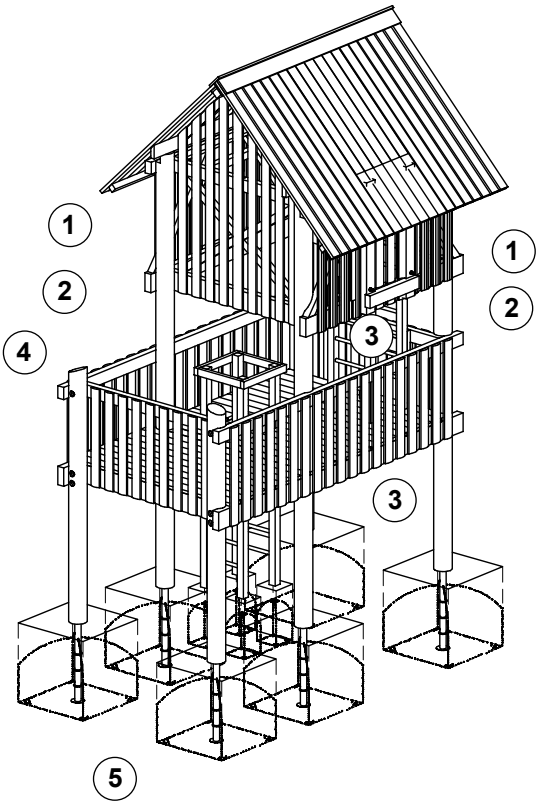


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground..... Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - the location - the usage - the frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Platform Tower Order No. K3.30000/L3.30000 	Wooden parts 1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐ 2. Check all bolts and screws are tight and retighten if necessary. ☐ 3. Check the ash wood rungs of the ladder for wear and tear, the remaining diameter must be at least 30 mm. ☐ 4. Recommendation: apply paraffin wax to the upper end grain areas once a year, please refer to order No. 0.90100, 1 litre. ☐ Structural stability 5. Uncover the foundation once a year in order to check for rot or corrosion. ☐	Special notes, e.g. for repairs	
	Repair not carried out, it is still possible to play on equipment	☐	
	Repair not carried out, equipment is taken out of action	☐	
	All work carried out, everything is in order	☐	
Maintenance carried out by: Date			