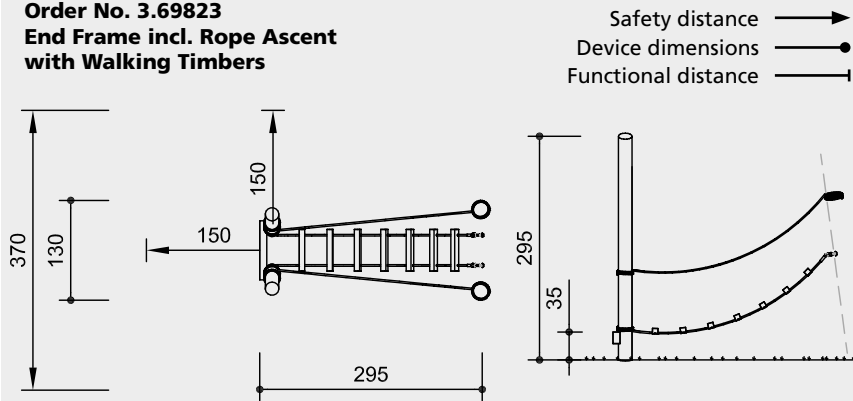
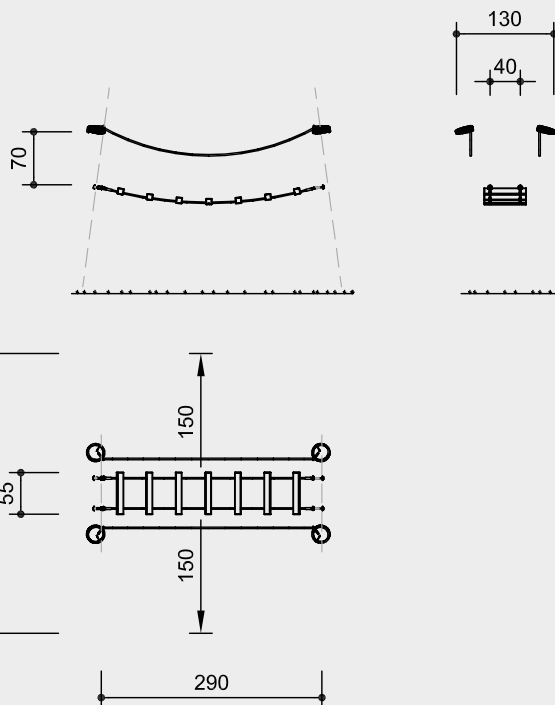


Order No. 3.69823
End Frame incl. Rope Ascent with Walking Timbers

Order No. 3.69825
Rope Crossing with Walking Timbers
Length 3.00 m


Scale 1:100

Safety check according to DIN EN 1176

Components
Order No. 3.69823

- 1 End frame with steel feet
- 1 Ladder with walkway
- 2 Handrails

Order No. 3.69825

- 1 Crossing with walkway
- 2 Handrails
- 2 Distance battens

Dimensions
(small deviations possible)
Order No. 3.69823

Height	2.95 m
Length	2.95 m
Width	1.30 m
Weight	150 kg

Order No. 3.69825

Length	2.90 m
Width	0.55 m
Weight	15 kg

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)

Foundations
Order No. 3.69823

- 1 item 100 x 100 x 60 cm
- Excavation depth 80 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.
Technical changes reserved.

Technical information
Order No. 3.69823
Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced


Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure


Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape


Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing


Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends


Rope connection with joint

Close-fitting connection with joint, without dangerous openings, with sintered bush and adjustable screw connection


Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Standard colour rope: natural

Order No. 3.69825
Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape


Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing


Aluminium rope pressing


Aluminium rope pressing, cylindrically pressed, with rounded ends


Rope connection with joint

Close-fitting connection with joint, without dangerous openings, with sintered bush and adjustable screw connection


For more detailed explanation of the quality characteristics see price list.


Standard colour rope: natural


3.69823


3.69825

Order No. 3.69840
Inclined Climbing Net

Safety distance →
Device dimensions —●—
Functional distance —|—

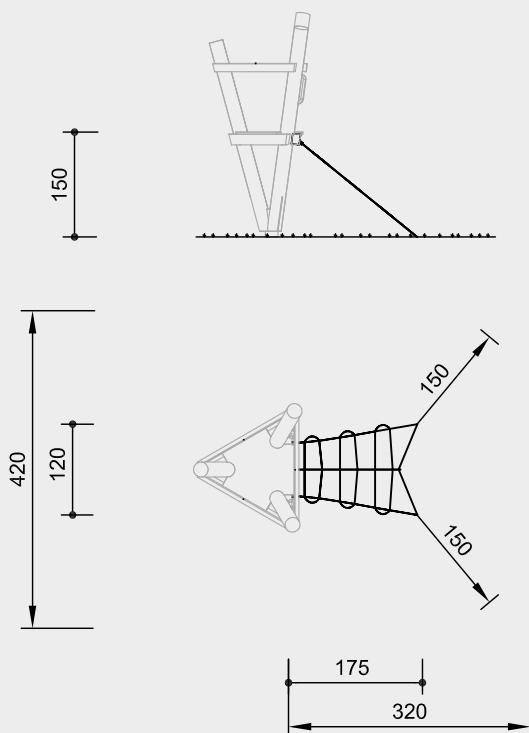

Order No. 3.69850
Vertical Climbing Net

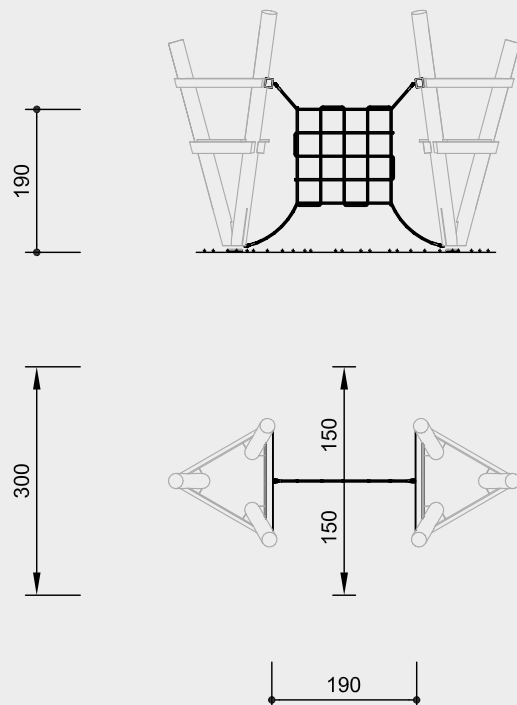

Scale 1:100

Safety check according to DIN EN 1176

Technical information

Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



S-connectors

S-connectors Ø 8.1 mm, made of high-quality stainless steel, rounded



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

Standard colour rope: natural

Dimensions

(small deviations possible)

Order No. 3.69840

Length	1.75 m
Width	1.20 m
Installation height	1.50 m
Weight	40 kg

Order No. 3.69850

Height	1.90 m
Length	1.90 m
Weight	50 kg

Components

Order No. 3.69840

1 Inclined climbing net, anchor irons with chains and tensioning devices

Order No. 3.69850

1 Vertical climbing net
1 Distance batten

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for price)
Foundations

Order No. 3.69840


2 items 50 x 50 x 40 cm
Excavation depth 80 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.
Technical changes reserved.



3.69840



3.69850