

Play value

Our Climbing Stack, made of debarked round timber, attracts attention and interest even from a distance. Thanks to different levels, large numbers of children can play together in a small space: the Climbing Stack allows for a flowing play rhythm even if lots of children spontaneously want to play. The Climbing Stack isn't just for climbing, experiencing heights and exploring the senses using hands and feet, it's also an attractive seating area, where the children can rest, chat and observe.



© Richter Spielgeräte GmbH 06/22

Design F. Dorband / K. H. Thiele


Fundamental characteristics

- Impressive design statement
- Very special appeal
- Attractive meeting point
- No pre-determined play procedures, also able to be used as stands for spectators, individual mastering
- Incentive for playing: experiencing height
- Movement: climbing up and around, balancing

Recommended for


- School children
- Young people
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Climbing Stack 1



4.21000

LudoCrea.ch GmbH — 6074 Giswil — +41 41 675 03 67 — info@ludocrea.ch

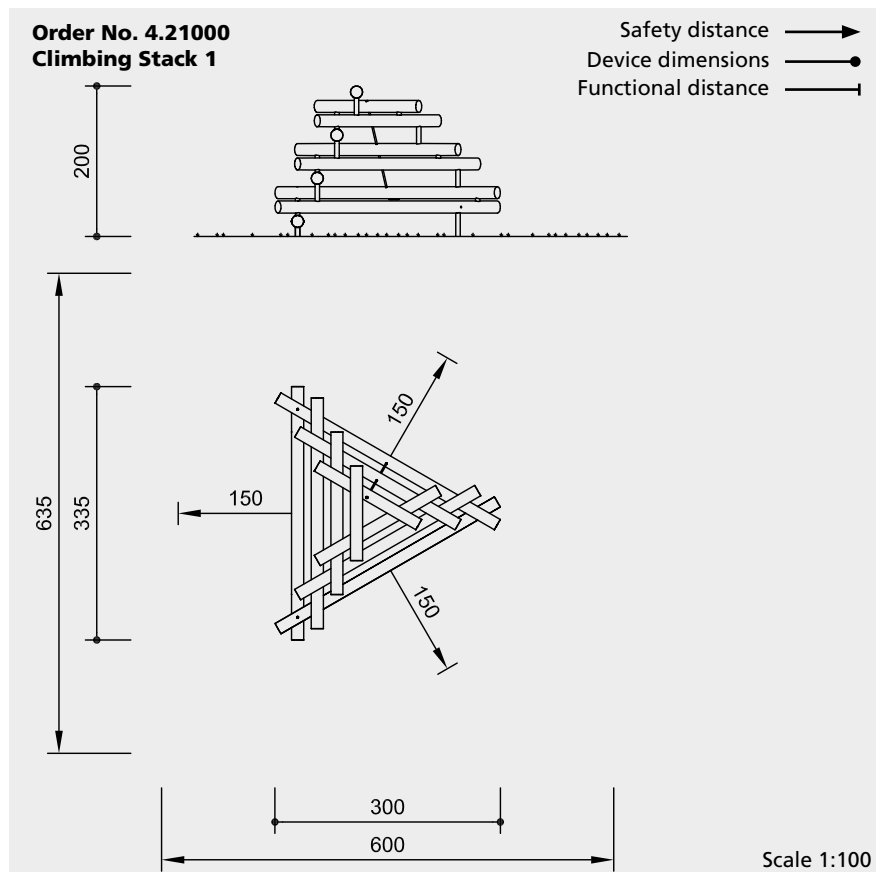

Safety check according to DIN EN 1176

Components

- 10 Round logs with 3 steel feet
- 1 Holding rope

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations
2 items 50 x 50 x 50 cm
Excavation depth 70 cm
1 item 60 x 60 x 30 cm
Excavation depth 50 cm

Attention:
Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

We reserve the right to make technical alterations!

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Height	2.00 m
Length	3.00 m
Width	3.35 m
Weight	460 kg



4.21000