

Play value

The climbing pyramid, constructed from debarked round logs, attracts attention and interest even from a long distance away. Its popularity arises from the different levels, which encourage a whole range of different exercise and role-playing games. The individual bars can be climbed and explored, serving not only for experiencing height and for tactile experiences on hands and feet, but also as attractive seating for resting, observing and chatting. The smaller version of our pyramid is particularly suitable for younger children, who can follow their natural drive for discovery and gain their first climbing experience here.

Fundamental characteristics

- Impressive design statement
- Very special appeal
- Eye-catcher of a play area
- Attractive meeting point
- Incentive for playing: curiosity, role-playing games, experiencing height
- Movement: climbing up

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks, leisure parks or similar



Small Climbing Pyramid

info@ludocrea.ch

|


6074 Giswil

LudoCrea.ch GmbH —







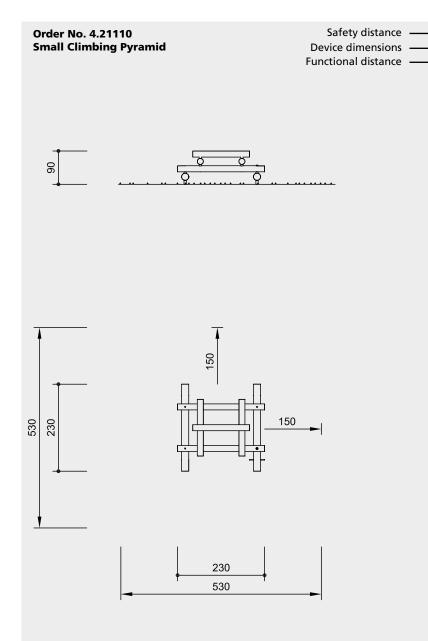

Scale 1:100

Components

7 Round logs with 4 steel feet

Safety check according to DIN EN 1176

Installation information

Surfacing requirements corresponding to a fall height of \leq 1.00 m (please refer to price list for more detailed information)

Foundations each 4 items 50 x 50 x 50 cm Excavation depth 70 cm

Attention: Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.



4.21110

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced

Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt

Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking

For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Height	0.90 m
Length	2.30 m
Width	2.30 m
Weight	250 kg

