



Play value

The climbing pyramid, constructed from debarked round logs, attracts attention and interest even from a long distance away. Its popularity arises from the different levels, which encourage a whole range of different exercise and role-playing games. The individual bars can be climbed and explored, serving not only for experiencing height and for tactile experiences on hands and feet, but also as attractive seating for resting, observing and chatting.

The smaller version of our pyramid is particularly suitable for younger children, who can follow their natural drive for discovery and gain their first climbing experience here.

Fundamental characteristics

- Impressive design statement
- Very special appeal
- Eye-catcher of a play area
- Attractive meeting point
- Incentive for playing: curiosity, role-playing games, experiencing height
- Movement: climbing up

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks, leisure parks or similar





Small Climbing Pyramid



4.21110

Order No. 4.21110
Small Climbing Pyramid

Safety distance 
 Device dimensions 
 Functional distance 

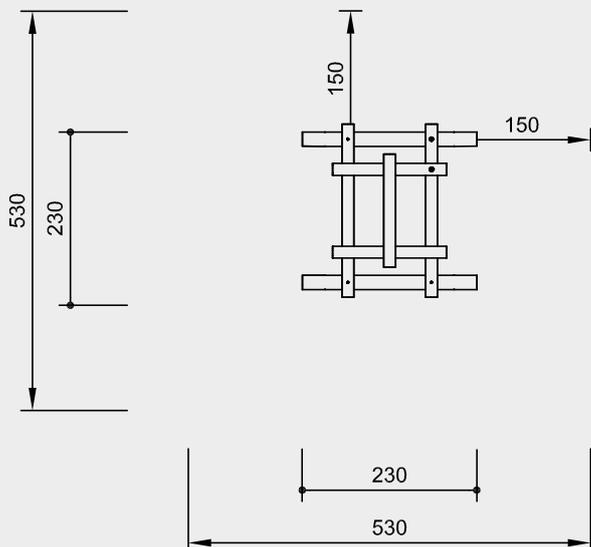

Scale 1:100

Safety check according to DIN EN 1176

Components


7 Round logs
 with 4 steel feet

Installation information

Surfacing requirements
 corresponding to a fall height of ≤ 1.00 m
 (please refer to price list for more
 detailed information)

Foundations each
 4 items 50 x 50 x 50 cm
 Excavation depth 70 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
 Technical changes reserved.



4.21110

Technical information

Equipment made of non-impregnated
 mountain larch

Peeled white

Palisades peeled white means that bark,
 cambium and sapwood are removed,
 the natural shape of the trunk is
 preserved and can be experienced



Profiled washer

Profiled washer for covering protruding
 screw heads according to standard,
 improved pressure distribution and
 protection against water. Impedes
 loosening the bolt



Adjustable

Adjustable two-piece bolt connection,
 easy to maintain,
 no projecting threads



Ground anchor

All parts used for anchoring to the
 ground are made of hot-dip galvanised
 steel or stainless steel



Relief cut

Targeted relief cut as an effective mea-
 sure against cracks caused by drying.
 The cut defines the position of the stress
 equalization in the trunk and minimises
 natural cracking



**For more detailed explanation of the
 quality characteristics see price list.**

Dimensions

(small deviations possible)

Height	0.90 m
Length	2.30 m
Width	2.30 m
Weight	250 kg