

Play value

The child-friendly design of this vehicle immediately encourages children to play. Little ones can use the motorbike for their first attempts at riding, and the simple shapes make it easy to hold on to, climb on and steer. Older children will also love this motorbike, as they can stand on it, rocking and engage in role-playing games. Who wouldn't want to be a stuntman or racing driver?



Photo © Alexandra Reese




Fundamental characteristics

- Friendly appearance
- Child-oriented dimensions
- Emotionally appealing design
- Natural wooden surface that appeals to the senses
- Incentive for playing: role-playing games
- Movement: climbing up, exploring by touch, rocking (side to side)


Recommended for

- Children under 3 years
- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Private play areas without supervision, such as camp sites or similar

Mini Motorbike



4.23500

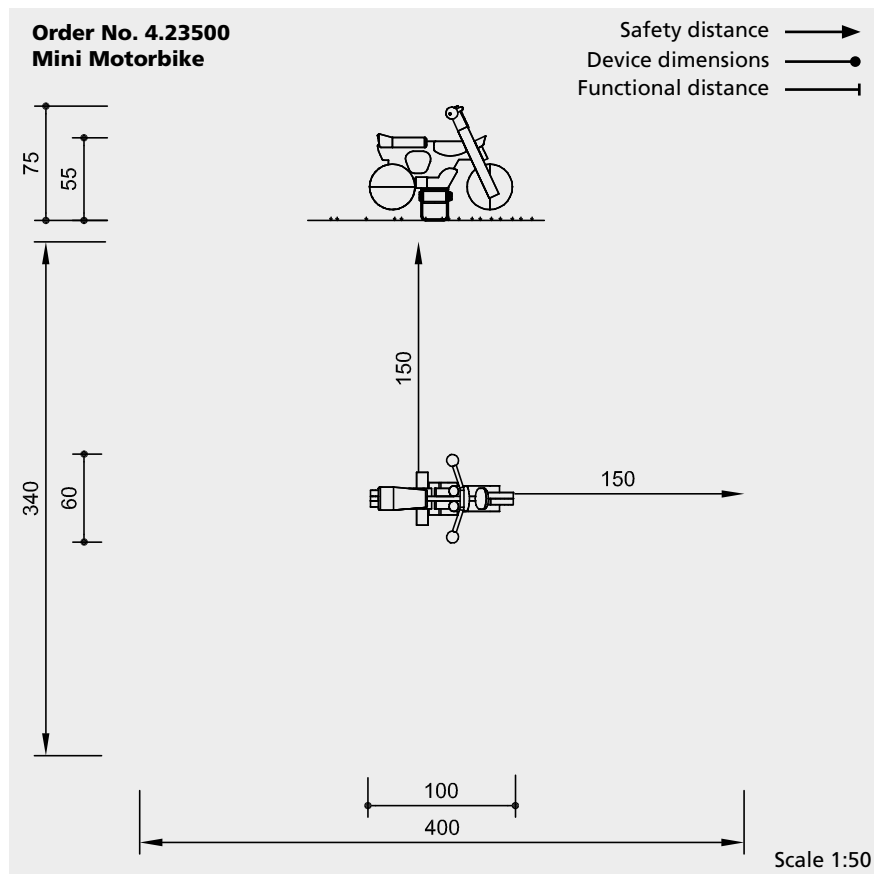

Safety check according to DIN EN 1176

Components

- 1 Mini Motorbike, mounted onto a galvanised rocking mechanism

Pre-fabricated foundation made of reinforced concrete C35/45 available, see **Order No. 4.24160** in the price list.

Installation information

Surfacing requirements
As for critical fall height ≤ 1.00 m (please refer to price list for more detailed information)

Foundations
1 item 30 x 50 x 20 cm
Excavation depth 40 cm

Note

Loose fall protection material is not suitable for installation with pre-fabricated foundation.

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



Steel reinforced rubber belt

Two-way steel reinforced rubber belt, total thickness approx. 11 mm, nearly indestructible



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel




For more detailed explanation of the quality characteristics see price list.

Handlebar made of stainless steel
Handle balls made of polyurethane

Dimensions

(small deviations possible)

Total height	0.75 m
Height seat	0.55 m
Length	1.00 m
Width	0.60 m
Weight	50 kg



4.23500