



### Play value

The Railway with locomotive, rail tender and wagons has a friendly look and gives small children the necessary stimulus for active play. It is an aide to the induction of simple exercises.




**Big Railway**

### Fundamental characteristics

- Child proportions according to ergonomic requirements
- Appealing design
- Natural wooden surface which appeals to the senses
- Incentive for playing: handles in the cabin, wagons
- Movement: exploring by touch, climbing, sitting
- Experiences: wood in its natural form with year rings, cracks etc.

### Recommended for


- Children under 3 years
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Private play areas without supervision, such as camp sites or similar



4.24100

**Order No. 4.24100**  
**Big Railway**

Safety distance →  
 Device dimensions —●—  
 Functional distance ——

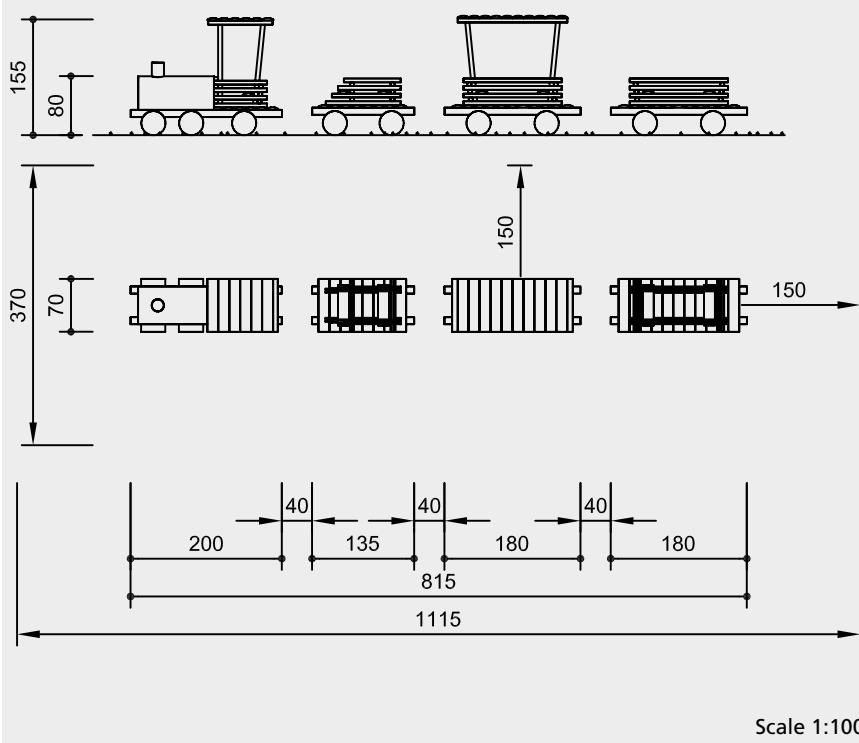

Safety check according to DIN EN 1176

**Components**

- 1 Locomotive
- 1 Rail tender
- 1 Wagon with roof
- 1 Wagon without roof with 2 foundation irons each

**Installation information**

Surfacing requirements corresponding to a fall height of  $\leq 1.00$  m (please refer to price list for more detailed information)

Foundations (only necessary to immobilise the equipment)  
 8 items 30 x 30 x 30 cm  
 Excavation depth 50 cm

**Attention:**  
**Exact measurements may vary;**  
**for all installation dimensions refer to current assembly instructions.**  
 Technical changes reserved.

**Technical information**

Equipment made of non-impregnated mountain larch

**Peeled white**

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced

**Core-free**

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape

**Claddings**

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible

**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

**Relief cut**

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



**For more detailed explanation of the quality characteristics see price list.**

Bell made of brass

**Dimensions**

(small deviations possible)

Height	1.55 m
Length	1.35 - 2.00 m
Width	0.70 m
Weight	820 kg



4.24100