

Play value

The appearance of the Snail Queen has a strong attractive force for small children. It can be used for riding or integrated into a role play situation. The Snail Queen creates a cosy atmosphere and helps to shape a small children's area in a friendly way.

Fundamental characteristics


- Child proportions according to ergonomic requirements
- Agreeable design
- Use of wood which appeals to the senses
- Incentive for playing: horns, eyes, snail shell
- Movement: defined pendulum movement, moving one's centre of gravity



Recommended for


- Kindergarten children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Snail Queen



4.24220

Order No. 4.24220
Snail Queen

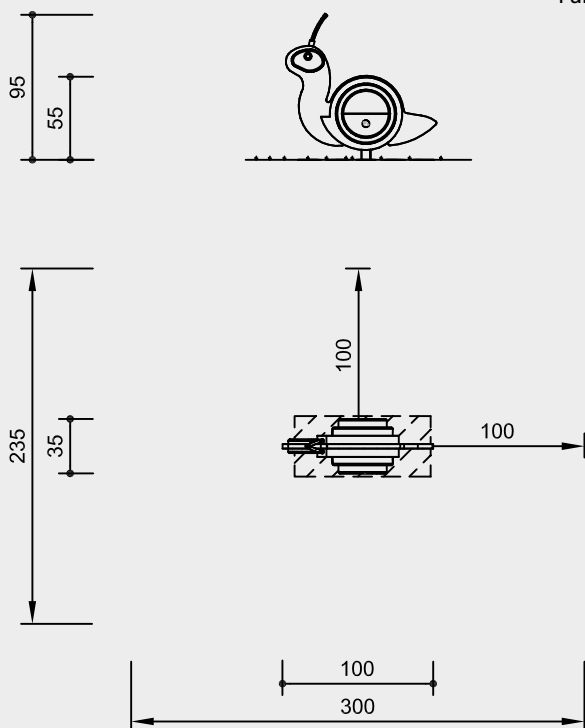

Scale 1:50

Safety check according to DIN EN 1176

Components

- 1 Snail body, mounted onto a galvanised rocking mechanism
- 1 Pre-fabricated foundation made of reinforced concrete C35/45

Installation information

Surfacing requirements as for critical fall height ≤ 1.00 m (please refer to price list for more detailed information)

Foundations
Excavation for pre-fabricated foundation 45 x 95 x 20 cm

Recommendation

When installed in loose ground, the pre-fabricated concrete foundation should be covered durably, e.g. with safety tiles.

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



For more detailed explanation of the quality characteristics see price list.

Equipment in natural colour, protected with lineseed oil

Rocking mechanism hot-dip galvanised

Standard colour rope (horns): rainbow

Dimensions

(small deviations possible)

Height	0.95 m
Sitting height	0.55 m
Length	1.00 m
Weight	130 kg



4.24220