



Play value

The well designed Mushroom Springs gives off water when the hemisphere on top gets pressed down. The water comes out like a circular veil.

The Mushroom Spring Elephant is especially appealing to smaller children. When the hemisphere is pressed, the water runs deep out of the trunk. When the hemisphere is pressed once, on all Mushroom Springs a valve is activated which stops the water flow after 25 seconds (from 0 up to 10 seconds adjustable), even if pressed permanently.

Fundamental characteristics

- High-quality design
- Automatic water stop
- Unique and original
- Incentive for playing: hemisphere, water
- Movement: physical effort

Recommended for

- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar
- Water play areas without supervision

Barrier-free

- Independent play



5.18000 - 5.18005 Mushroom Spring



Order No. 5.18015 / 5.18017 Mushroom Spring Elephant



5.18000 - 5.18005 Mushroom Spring, Photo © Paul Upward


Planning information

Individual solutions for the water supply must be devised, depending on the plans. Up-to-date details on the connection for the water supply and other technical information is available to download as a table at our website www.richter-spielgeraete.de.


Mushroom Spring Foundation Anchor



5.18000 - 5.18005



5.18006

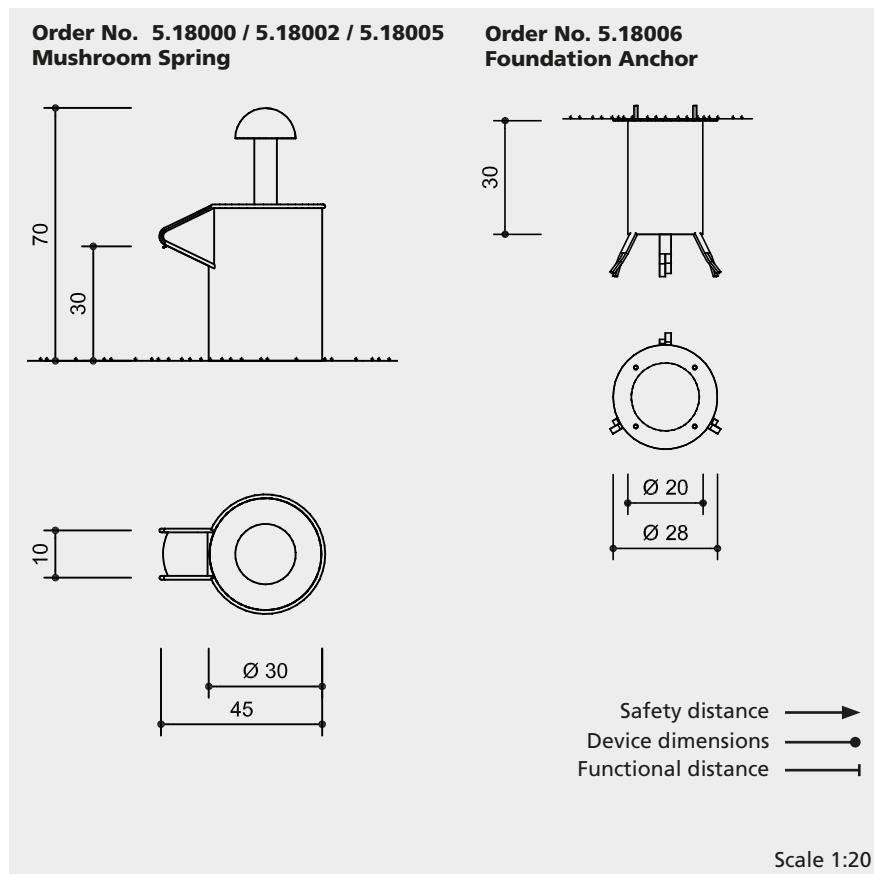

Safety check according to DIN EN 1176

Components

Order No. 5.18000 / 5.18002 / 5.18005

- 1 Mushroom Spring
- 1 Winter lid made of stainless steel (Order No. 0.97840)

Order No. 5.18006

- 1 Foundation Anchor

During the frost period, the insert must be removed with the valve.

The opening can be closed with the winter lid.

Attention:

Exact measurements may vary, for all installation dimensions refer to current installation instructions.

Technical changes reserved.

For use in aggressive environments such as salt or chlorine water, the equipment is also available in marine grade steel (V4A).

Technical information

Equipment completely made of stainless steel, glass bead blasted, with self-resetting pressure valve

Order No. 5.18006 Foundation Anchor

made of galvanised steel

Dimensions

(small deviations possible)

Order No. 5.18000 / 5.18002 / 5.18005 Mushroom Spring

Height	0.70 m
Diameter	0.30 m
Width	0.45 m
Weight	37 kg

Order No. 5.18004 / 5.18001

As above, but

Height	0.80 m
Weight	22 kg / 40 kg

Order No. 5.18006 Foundation Anchor

Height	0.30 m
Diameter	0.28 m
Weight	8 kg

Order No. 0.97840

Winter lid

Diameter	0.30 m
Weight	1.30 kg

Installation information

Surfacing requirements recommendation: paving stone or similar with drainage.

The Mushroom Spring

Order No. 5.18000 can be installed on natural stone, pedestal etc.

Order No. 5.18002 as before, but with programmable rinsing device, powered by an internal battery

The Mushroom Spring

Order No. 5.18005 can be installed on concrete Water Basins **Order No. 5.22000, 5.22100, 5.24200 and 5.24400.**

Order No. 5.18004 as before, with programmable rinsing device, powered by an internal battery

Foundations


Order No. 5.18006

1 item 60 x 60 x 30 cm
Excavation depth 50 cm

The Mushroom Spring needs to be connected directly to the mains water (2.5 - 5 bar); Connection thread on Equipment 3/4 inch inside (Recommendation: a pressure-resistant pipe with a diameter of 3/4 inch), water requirement approx. 10 l/min at 3 bar.



5.18000 - 5.18005



5.18006