

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Spring Head

1. Unscrew the flange and detach the spray-head from the water line.


2. Clean the shaft.

3. Rinse the sprayhead and, if necessary, unscrew the dome and remove dirt.


4. Reconnect the sprayhead to the water line and check for leaks.

5. Reattach dome and flange.

Special notes, e.g. for repairs

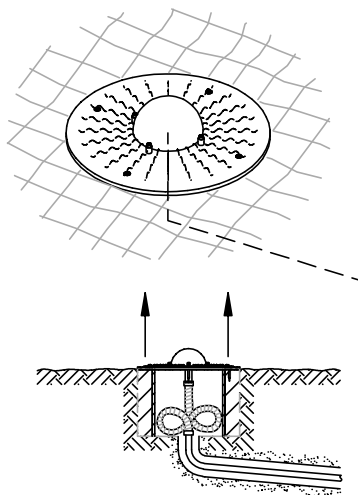

**Repair not carried out,
it is still possible to play on equipment**

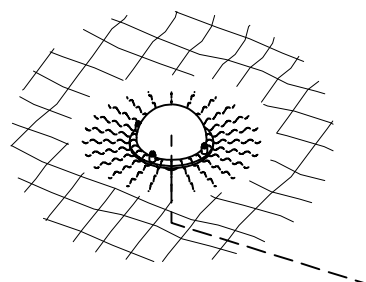

**Repair not carried out,
equipment is taken out of action**

**All work carried out,
everything is in order**

Maintenance carried out by:

..... Date