



Order No. 5.28032 Sickle Gate



Order No. 5.28035 Rotating Gate

**Play value**

Experience the power of water – this can be achieved particularly well by damming water and then opening the floodgates. It is most fun when natural materials such as mud, leaves and small sticks are used to dam the water. However, this is often not possible or desired. Therefore, complementary elements such as locks or flaps are required.

**Fundamental characteristics**

- Easy handling
- Sturdy construction


**Recommended for**

- Kindergarten children
- Supervised play areas such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision such as playgrounds, parks or similar



Order No. 5.28035 Rotating Gate, Photo © Daniel Perales

**Sickle Gate  
Rotating Gate**




5.28032




5.28035

**Order No. 5.28032**  
**Sickle Gate**

Safety distance →  
Device dimensions ●  
Functional distance —

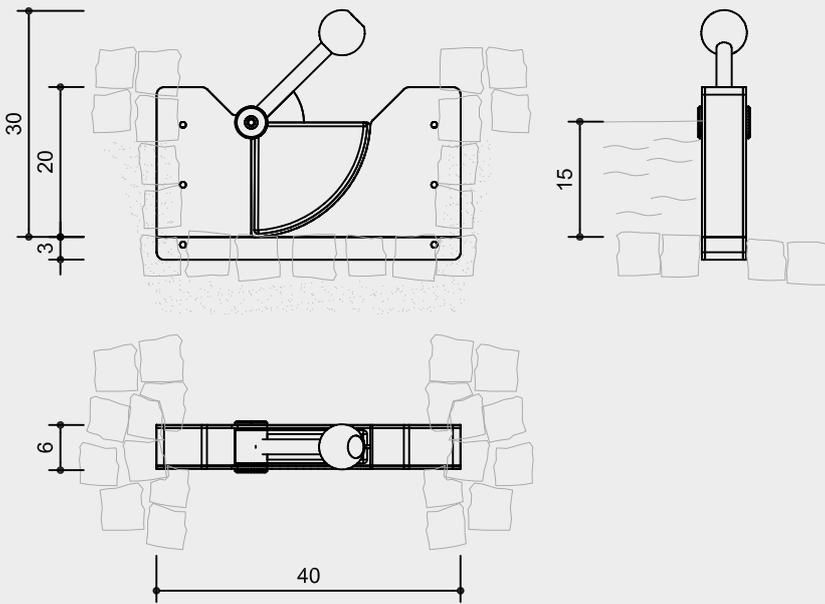


**Order No. 5.28035**  
**Rotating Gate**

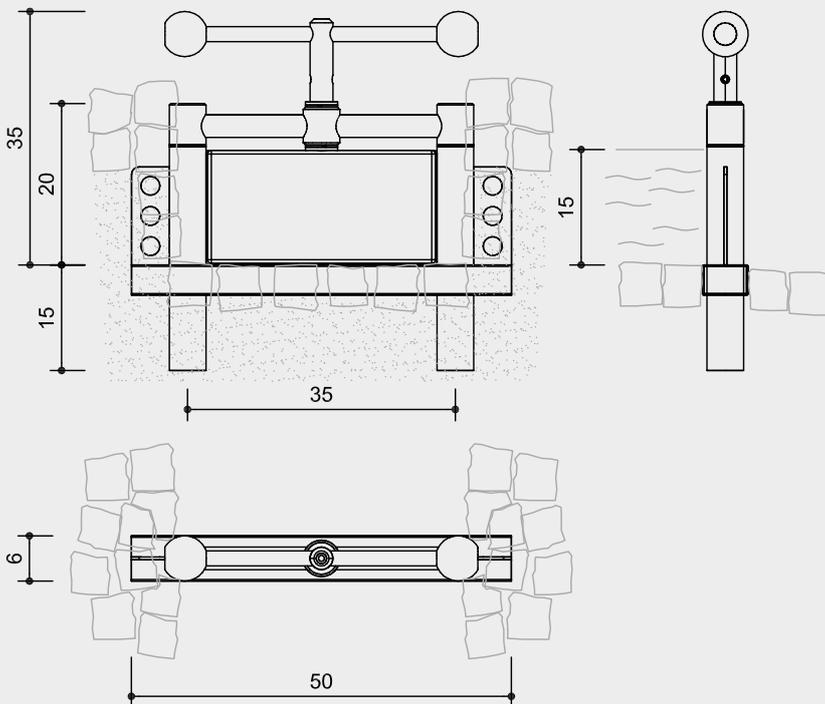


Scale 1:10

Safety check according to DIN EN 1176



5.28032



5.28035

**Technical information**

**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



**Order No. 5.28032**  
**Sickle Gate**

Cover plates made of stainless steel, glass-bead blasted  
Body, gate, ball head and plain bearing made of impact-resistant, coloured-through PUR plastic parts, black

**Order No. 5.28035**  
**Rotating Gate**

Turning frame made of stainless steel, glass-bead blasted  
Plain bearings, gates and ball heads made of impact-resistant, coloured-through PUR plastic parts, black

**Dimensions**

(small deviations possible)

**Order No. 5.28032**  
**Sickle Gate**

Height	0.30 m
Width	0.40 m
Damming height	0.15 m
Weight	10 kg

**Order No. 5.28035**  
**Rotating Gate**

Height	0.35 m
Width	0.50 m
Damming height	0.15 m
Weight	9 kg

**Components**

**Order No. 5.28032**  
**Sickle Gate**

1 Sickle Gate  
**Registered Design**  
40 2020 202 219.9 Germany

**Order No. 5.28035**  
**Rotating Gate**

1 Rotating Gate  
**Registered Design**  
40 2020 202 215.6 Germany

**Installation information**

Surfacing requirements  
Recommendation: surface of reinforced watercourse

All equipment can be easily installed into any artificial watercourse.

Foundations  
According to installation situation.

**Attention:**

**Exact measurements may vary; for all installation dimensions refer to current assembly instructions.**

Technical changes reserved.

**For use in aggressive environments such as salt or chlorine water, the equipment is also available in marine grade steel (V4A).**