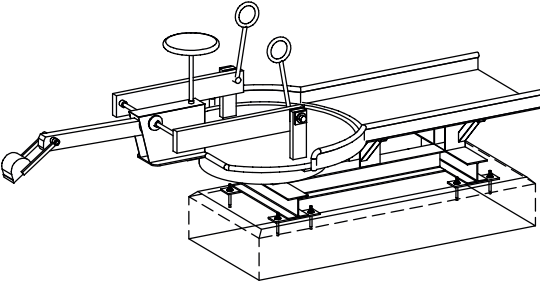


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground..... Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - the location - the usage - the frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Excavator with wheelchair access Order No. 5.30100 	Joints 1. Check that the slew (rotating) joint moves smoothly (remove any sand which may have accumulated around the base). ☐ 2. Check that the main joint moves smoothly. ☐ 3. Check that the excavator arm joint and shovel joint move smoothly. ☐ 4. Apply grease to the lubricating nipple on the shovel joint. ☐ Brake 5. Check function: when a load is placed on the seat, it must be possible to rotate the base; when no load is placed on the seat, rotation must stop immediately; replace rubber buffer if it is worn. ☐ Excavator shovel 6. File down any sharp edges that may have arisen on the shovel from wear and tear. ☐ Seat 7. Check the condition of the surface; smooth out if necessary. ☐ Structural stability 8. In order to check the anchoring to the ground, uncover the foundation once a year. ☐	Special notes, e.g. for repairs	
	Repair not carried out, it is still possible to play on equipment	☐	
	Repair not carried out, equipment is taken out of action	☐	
	All work carried out, everything is in order	☐	
Maintenance carried out by: Date			