

Play value

Round spring platforms are mounted on strong, low springs. It is not only fun to jump on them, but one can jump off the disc in any direction, as from a spring-board. The momentum which is enforced by the springs propels the jumping child quite far. Jumping from one disc to the other represents a special sequence of movements and a challenge for small children.



Photo © Daniel Perales



Photo © Barbara Evripidou

Fundamental characteristics

- Wooden surface with natural structure for a good grip
- Incentive for playing: round, low wooden plate, springs
- Movement: jumping up and down, jumping off, hopping


Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar


Planning information

The installation of at least two Jumping Discs is recommended.

Jumping Disc



6.06000

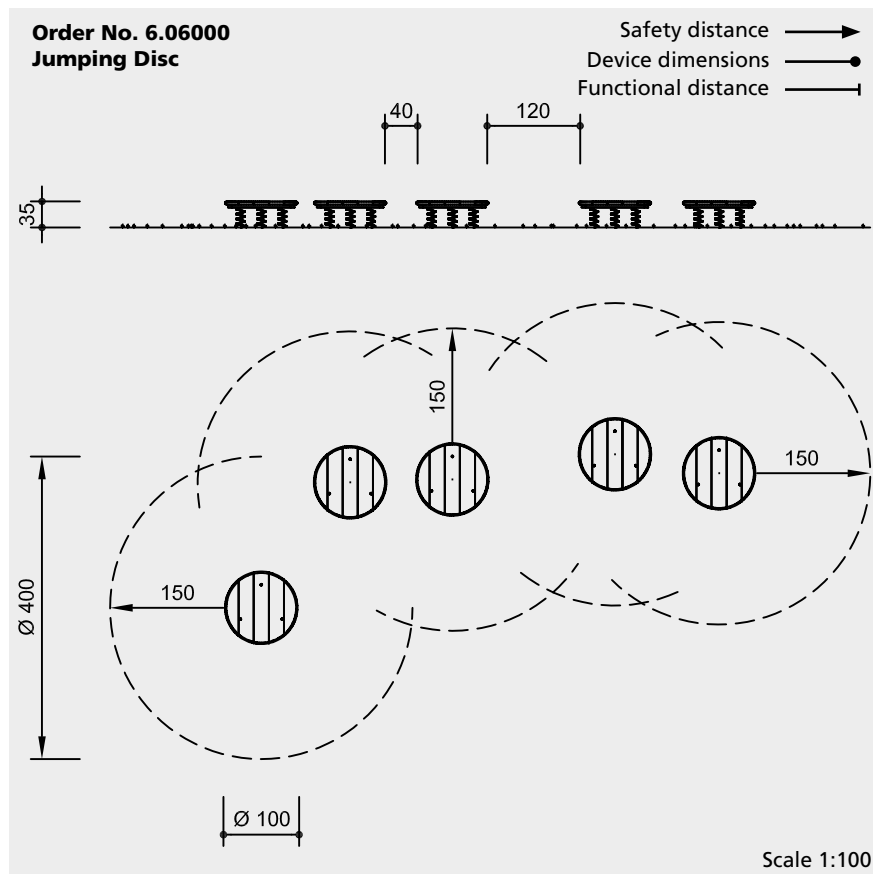

Safety check according to DIN EN 1176

Components

- 1 Disc complete with 3 springs
- 1 Pre-fabricated foundation made of reinforced concrete C35/45

Installation information

Surfacing requirements corresponding to a fall height of ≤ 0.60 m (please refer to price list for more detailed information)
We recommend a fall height of ≤ 1.00 m.

Foundations
Excavation for pre-fabricated concrete foundation $\varnothing 95$ cm x 15 cm
For installation in loose material, an additional anchorage in concrete is necessary on-site.

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



For more detailed explanation of the quality characteristics see price list.

Top of 45 mm boards, screwed together with expansion joints

Coated springs,
Standard colour red

Fastening elements galvanised

Dimensions

(small deviations possible)

Height	0.35 m
Diameter	1.00 m
Weight	170 kg



6.06000