

Play value

Here both big and small adventurers have fun by cooperating in this interactive game. Various invisibly acting forces reach a harmonious equilibrium in the swinging movement. You are transported into a state of physical well-being. The swing experience, the harmonious back-and-forth motion of the swing with long swing paths, is enhanced when standing instead of sitting on the thick swing rope.



So in addition to the tingling in the tummy, the movement creates an invitation to role-playing games - knights, pirates or Vikings on their way to open a castle gate with the characteristic swinging movement.

Fundamental characteristics

- Unique and original
- The design allows several people to coordinate in movement
- Diverse play experiences
- Incentive for playing: huge construction, role-playing games
- Movement: swinging, balancing, body coordination

Recommended for

- School children
- Young people
- Supervised play areas, such as schools, after-school programmes or similar.
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar.



Rope Swinger



6.19020

Order No. 6.19020
Rope Swinger

Safety distance 
Device dimensions 
Functional distance 

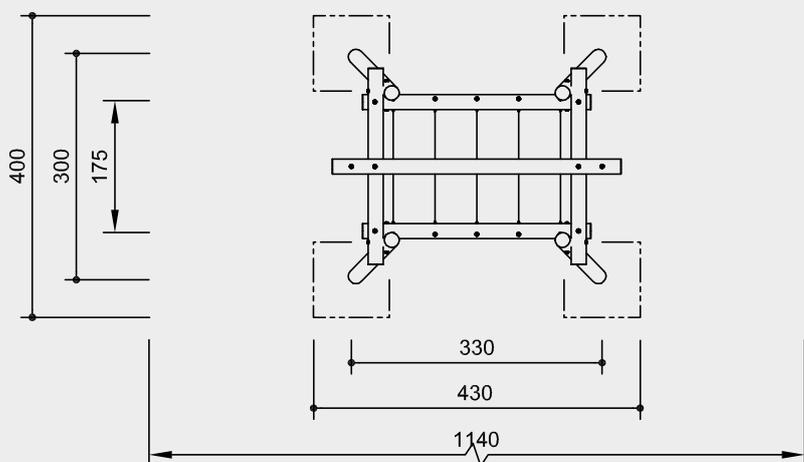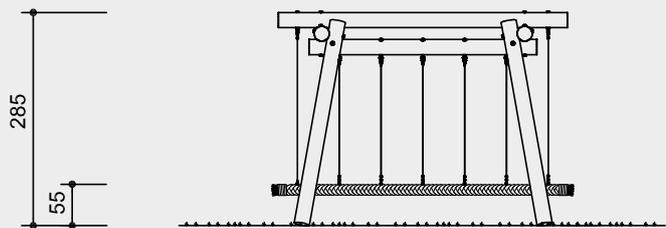

Scale 1:100

Safety check according to DIN EN 1176

Components

- 1 Frame with steel feet
- 1 PP-Rope with Chains

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations
4 items 100 x 100 x 60 cm
Excavation depth 80 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Stainless Chains

Chains made of steel with high corrosion resistance. Short-linked, without eyelets on the connecting parts, easily replaceable and simple shortening



For more detailed explanation of the quality characteristics see price list.

Rope made of PP fibre \varnothing 150 mm with 12 mm galvanised steel core

Dimensions

(small deviations possible)

Height	2.85 m
Vertical clearance	2.25 m
Width	3.30 m
Depth	3.00 m
Weight	500 kg



6.19020