

Play value

This agreeably shaped carousel is a good combination of wood and stainless steel; due to its high quality design it is also suited for installation in town centres. The curved tubes invite one to lean on and relax and also give support at higher turning speeds. Communication and cooperation enhance the experience gained from the pushing required to set the carousel in motion. This equipment for active play can be offered as interesting, rather unobtrusive, meeting point for teenagers.




Fundamental characteristics

- Agreeable design
- Unobtrusive appearance
- Solid wooden floor for a firm hold and comfortable standing and seating
- Incentive for playing: bars, big round surface
- Movement: pushing, turning


Recommended for

- School children
- Young people
- Public play areas without supervision, such as playgrounds, parks or similar

Standing Carousel



6.26503

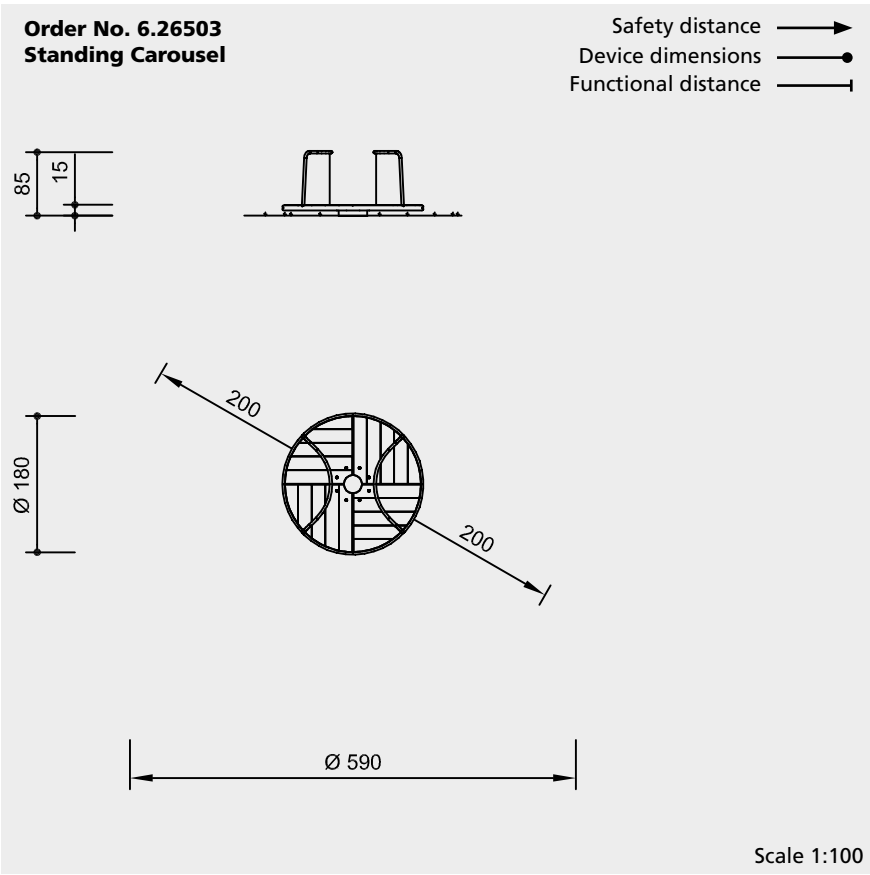

Safety check according to DIN EN 1176

Components

- 1 Carousel
- 1 Foundation frame
- 1 Bearing

Installation information

Surfacing requirements
surfacing required as for critical fall
height of ≤ 1.00 m
(please refer to price list for more
detailed information)

Foundations
1 item 80 x 80 x 70 cm
Excavation depth 80 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of stainless steel,
glass bead blasted

Core-free

Sawn-timbers core-free, thus decreasing
occurrences of cracking and undesired
changes in shape



Ground anchor

All parts used for anchoring to the
ground are made of hot-dip galvanised
steel or stainless steel



Roller bearings

High-quality roller bearings made
of chrome steel or stainless steel for
rotating elements, easy to maintain and
exchange, sealed



**For more detailed explanation of the
quality characteristics see price list.**

Rotating floor of 35 mm planks made of
non-impregnated mountain larch

Expanding and shrinking of the planks
is reduced by relief cuts applied to the
underside

Easy grip handrail tubes, Ø 33.7 mm


Sturdy, welded substructure

Foundation frame of steel

Dimensions

(small deviations possible)

Height	0.85 m
Diameter	1.80 m
Weight	190 kg



6.26503