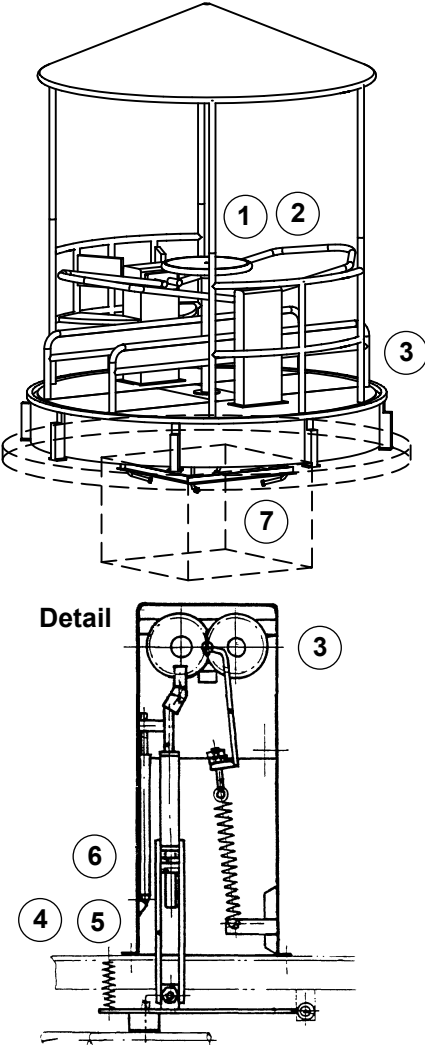


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - location - kind of use - frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Big Wheelchair Carousel Order No. 6.29000 	Bearing (axle) 1. Check the rotary motion for smoothness (it must be possible to turn the gripping plate with one hand) ☐ 2. Lubricate once a year (Lubricating nipple is located inside the housing on the floor) ☐ 3. Remove the top cover of the housing and grease the gearwheels (see detail). ☐ Braking mechanism 4. Check the braking disc for cleanliness, if necessary remove the rubber and clean (remove the bottom cover of the housing and the small floor plate between the housing and the railing), the safety bar must be in position for „free wheeling“. ☐ 5. Check the setting of the brake, brake must engage at 8 cm. ☐ 6. Adjusting of the brake mechanism: Put the safety bar in the upright position, shift the setting collar and adjust. ☐ Structural stability 7. Check the fastening of the carousel to the foundation frame once a year; tighten the screws if necessary. ☐ Repair not carried out, it is still possible to play on equipment ☐ Repair not carried out, equipment is taken out of action ☐ All work carried out, everything is in order ☐ Maintenance carried out by: Date	Special notes, e.g. for repairs	