

Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground

Date of installation


Checks depend on the kind of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on:

- location
- kind of use
- frequency of use
- possible vandalism

For more details see also „General instructions for maintenance of playgrounds“.

Small Wheelchair Carousel
Order No. 6.32500

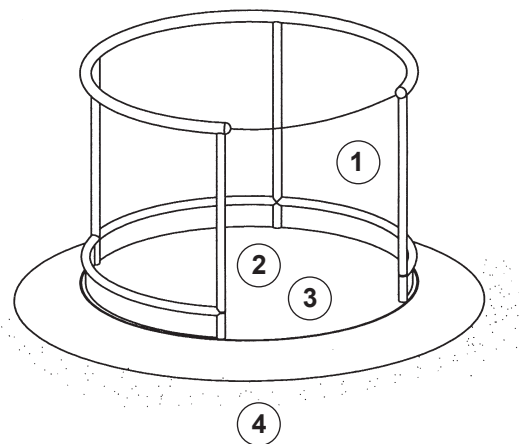

Operation

1. Check the Roundabout for smooth motion
2. Re-lubricate the bearings every 6 - 8 weeks (lubrication nipple is located under the removable company plate)
3. Clean the gaps

Structural stability

4. Check the ground support of the play facility (re-fill hollows in the ground adjacent of the Roundabout or change the location of it)

☐
☐
☐
☐

Special notes (e. g. for repairs):

Repair not carried out, it is still possible to play on equipment

☐

Repair not carried out, equipment is taken out of action

☐

All work carried out, everything is in order

☐

Maintenance carried out by

..... Date