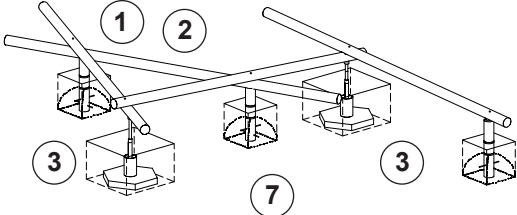
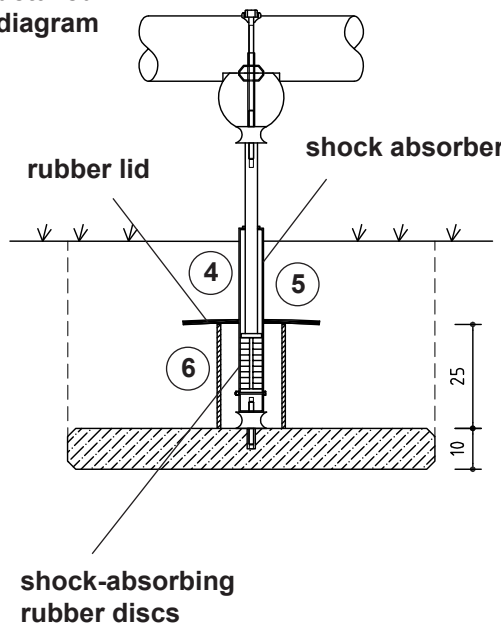


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - location - kind of use - frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Jackstraws See-saw Order No. 6.50600/6.50601  detailed diagram 	Wooden parts 1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐ 2. Check that all bolts and screws are tight and retighten if necessary. ☐ Rubber components 3. Check for material fatigue (can become porous), replace if necessary. ☐ 4. Check rubber for vandalism (see detailed diagram). ☐ Shock absorber 5. Check that shock absorbers are securely connected (see detailed diagram). ☐ 6. Check shock-absorbing rubber discs for wear and tear. Replace if they become worn and start to fall apart (decompose into individual pieces). ☐ Structural stability 7. In order to check for rot at wooden parts or steel feet for corrosion, uncover the foundations once a year. ☐	Special notes, e.g. for repairs	
	Repair not carried out, it is still possible to play on equipment	☐	
	Repair not carried out, equipment is taken out of action	☐	
	All work carried out, everything is in order	☐	
Maintenance carried out by: Date			