

Play value

The Tractor Platform is visible from afar and attracts children of all ages. It is particularly suitable as the design centre-piece of a play area. An inclined climbing net can be used to access the platform, which has two interconnected play levels with plenty of room for imaginative role-playing games. Tractor drivers and adventurers can quickly leave the vehicle at any time using the bent firemen's pole or the wide slide. Smaller children also can play under the platform, take a break or hide.




Fundamental characteristics

- Natural wooden surface that appeals to the senses
- Harmonious, friendly design
- Strong formal expressive character
- Very special appeal
- Eye-catcher of a play area
- Incentive for playing: experiencing height, role-playing games
- Movement: climbing, sliding

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Tractor Platform



7.79500

Order No. 7.79500
Tractor Platform

Safety distance →
Device dimensions —●—
Functional distance —|—

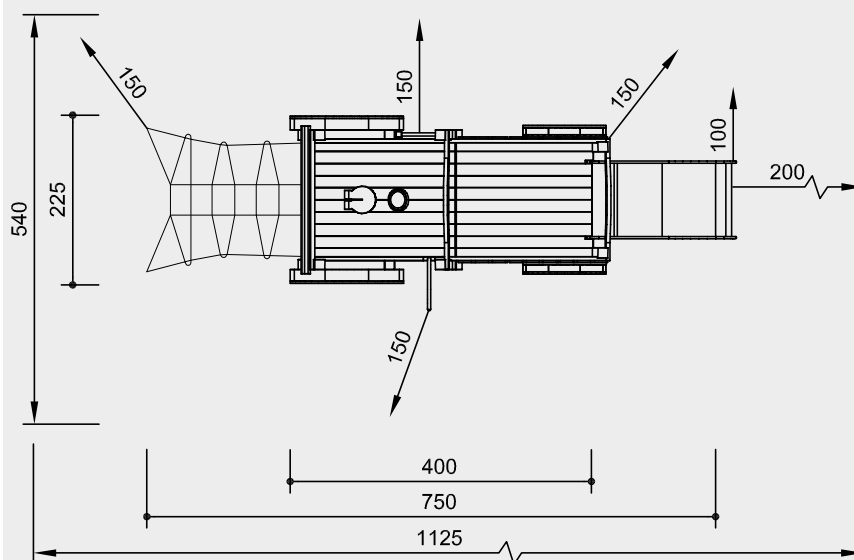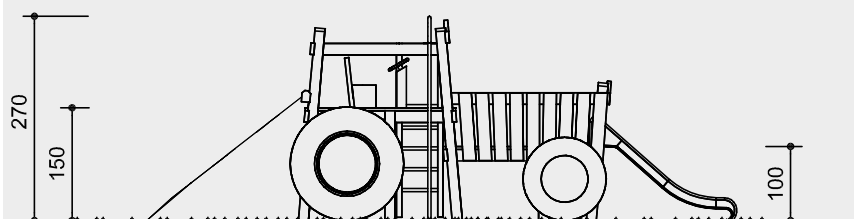

Scale 1:100

Safety check according to DIN EN 1176

Components

- 2 Platforms with steel feet
2 sides covered, coloured as shown,
with 4 wheels and crawl tube made
of PVC
- 1 Ladder
- 1 Handle bar
- 1 Seat
- 1 Stainless Steel Slide with
ground anchor,
Order No. 3.63300
- 1 Firemen's Pole,
Order No. 3.69464
- 1 Inclined Climbing Net,
Order No. 3.69160

Installation information

Surfacing requirements
corresponding to a fall height of ≤ 1.50 m
(please refer to price list for more
detailed information)

Foundations

- 6 items 60 x 60 x 60 cm
Excavation depth 80 cm
- 2 items 110 x 60 x 60 cm
Excavation depth 60 cm
- 2 items 50 x 50 x 40 cm
Excavation depth 80 cm
- 1 item 30 x 30 x 30 cm
Excavation depth 60 cm
- Excavation for Slide
1 item 120 x 55 x 45 cm (No concrete
required)

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated
mountain larch

Bevel cut

Vertical stand posts with bevelled end
grain section as constructive wood
preservation measure



Core-free

Sawn-timbers core-free, thus decreasing
occurrences of cracking and undesired
changes in shape



Tongue and groove

Tongue and groove planks made of
4 cm solid wood, highly resilient, no
trickling of dust / sand, protection
against direct rain



Hardwood rungs

Climbing rungs made of hardwood (ash)
Ø 4.2 cm, milled and mortised, secured
against twisting, easy to grip and not
cold for children to touch



Richter Hercules type rope

Richter Hercules type rope, a combina-
tion of galvanised six-strand steel cables
and polyester yarn, diameter > 20 mm,
laid and glued with very good abrasion
resistance, strong sheathing even in the
case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically
pressed, with rounded ends



S-connectors

S-connectors Ø 8.1 mm,
made of high-quality stainless steel,
rounded



Rope connection fixed

Fixed rope connection without dan-
gerous openings. Screw connection
adjustable and countersunk in the wood



Profiled washer

Profiled washer for covering protruding
screw heads according to standard,
improved pressure distribution and
protection against water. Impedes
loosening the bolt



Adjustable

Adjustable two-piece bolt connection,
easy to maintain,
no projecting threads



Ground anchor

All parts used for anchoring to the
ground are made of hot-dip galvanised
steel or stainless steel



**For more detailed explanation of the
quality characteristics see price list.**

Crawl tube Ø 80 cm made of PVC, grey

Dimensions

(small deviations possible)

Length	7.50 m
Width	2.25 m
Height	2.70 m
Height of Net	1.50 m
Weight	approx. 900 kg



7.79500