

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground .....

Date of installation .....

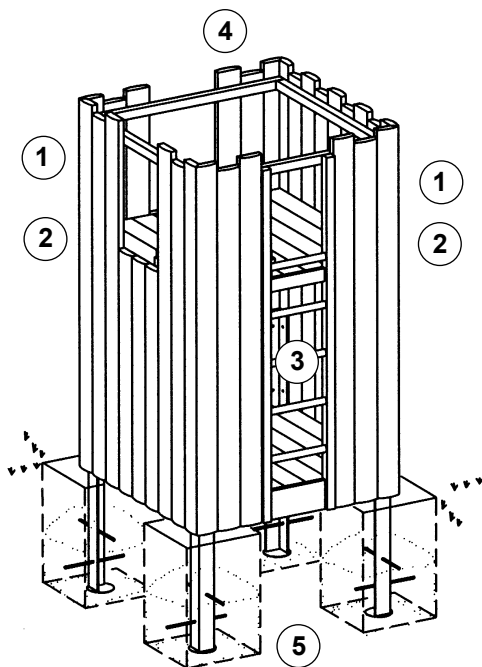
Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on

- location
- kind of use
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

**Square Tower**  
**Order No. L3.20500**



## Wooden parts

1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐
2. Check that all bolts and screws are tight and retighten if necessary. ☐
3. Check the ash wood rungs of the ladders for wear and tear, the remaining diameter must be at least 30 mm. ☐
4. Recommendation: Apply paraffin wax to the upper end grain areas once a year, please refer to Order No. 0.90100, 1 litre. ☐

## Structural stability

5. In order to check the steel feet for corrosion, uncover the foundation once a year. ☐

Special notes, e.g. for repairs

Repair not carried out,  
it is still possible to play on equipment ☐





Repair not carried out,  
equipment is taken out of action ☐

All work carried out,  
everything is in order ☐

Maintenance carried out by:

..... Date .....

For spare parts refer to back of page.

<div><div><div>Spare Parts</div><div>Square Tower</div><div>Order No. L3.20500</div></div><div></div><div><div>Please note that the safety standards of the equipment must not be affected. Therefore, when carrying out repairs it is helpful <b>to only use original parts.</b></div></div></div>	
Order No.	Spare part
0.92630	Ladder
	
0.98310	Single rung
	
0.30053	Tower cladding, length 2.80 m spruce, impregnated
	
0.30063	Tower cladding, length 2.80 m larch
	Please indicate length and width!