

Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground

Date of installation

Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on:

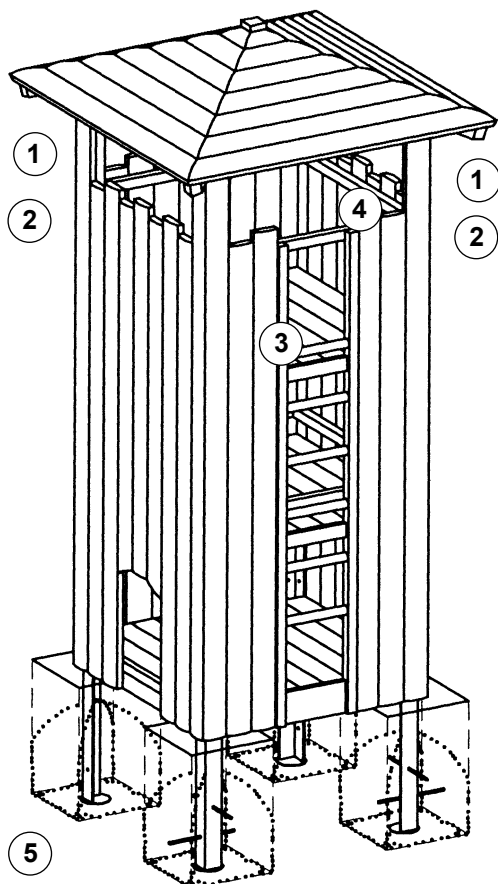
- location
- kind of use
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

Square Tower

Order No. L3.20600 with Roof

Order No. L3.20610 without roof



Wooden parts

1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐
2. Check that all bolts and screws are tight and retighten if necessary. ☐
3. Check the ash wood rungs of the ladders for wear and tear, the remaining diameter must be at least 30 mm. ☐
4. Recommendation: Apply paraffin wax to the upper end grain areas once a year, please refer to Order No. 0.90100, 1 litre. ☐

Structural stability

5. In order to check the steel feet for corrosion, uncover the foundation once a year. ☐

Special notes, e.g. for repairs

Repair not carried out, it is still possible to play on equipment ☐




Repair not carried out, equipment is taken out of action ☐

All work carried out, everything is in order ☐

Maintenance carried out by:

..... Date

For spare parts refer to back of page.

Spare Parts Square Tower Order No. L3.20600/L3.20610  Please note that the safety standards of the equipment must not be affected. Therefore, when carrying out repairs it is helpful to only use original parts.	
Order No.	Spare part
0.92620	Ladder
	
0.98310	Single rung
	
0.30050	Tower cladding, length 3.25 m spruce, impregnated
	
0.30060	Tower cladding, length 3.25 m larch
Please indicate length and width!	