



Play value

Our Building Site Combination offers numerous opportunities for creative play and exercise. The platform can be reached via a ladder, while the slide offers a swift getaway. The diverse "work" equipment, hut and the play area under the platform invite children to hide away and engage in different kinds of role-playing games. Working together on the building site is equally enjoyable for both big and small children.

Fundamental characteristics

- Child-oriented dimensions according to ergonomic knowledge
- Space-defining design and natural wooden surface appeal to the senses
- Offers a range of play opportunities
- Large play area underneath the platform
- Incentive for playing: sand hoists, sand wheel, chains, climbing net, swing, slide
- Movement: physical effort, swinging, sliding

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Special version without Single swing




Building Site Combination 0338



L5.03380

Order No. L5.03380
Building Site Combination 0338

Safety distance →
 Device dimensions —●—
 Functional distance —|—

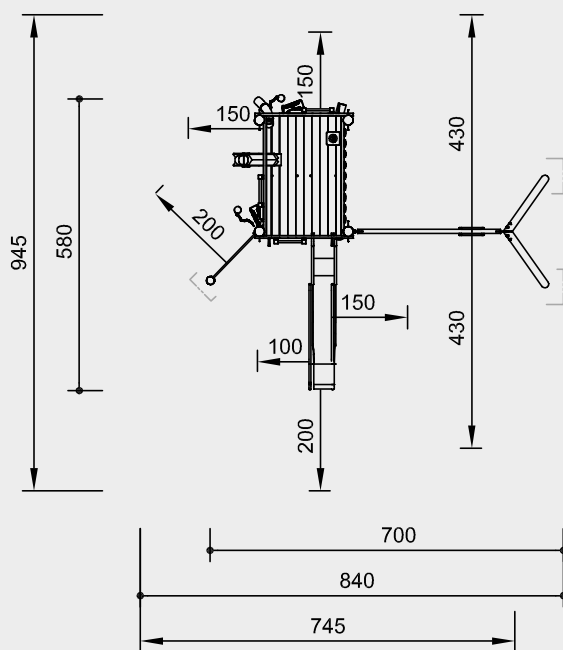

Scale 1:150

Safety check according to DIN EN 1176

Components

- 1 Platform with steel feet
- 3 Ladders
- 2 Sand hoists with 2 shovels and chain
- 2 Sand pipes
- 1 Sand chute, 2 levels, 1 sand wheel
- 1 Balustrade at the side of the swing
- 1 Single swing with steel feet and swing suspension
- 1 Stainless steel slide with ground anchor,
Order No. 3.63020
- 1 Horizontal Bar with steel foot,
Order No. L3.69720

Dimensions

Height	3.00 m
Platform height	1.50 m
Platform floor	1.60 x 2.50 m
Length	7.00 m
Width	5.80 m
Weight	900 kg

Installation information

Surfacing requirements depend on overall construction corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)

Sand is required for correct functioning.

Foundations

Building Site
 4 items 60 x 60 x 60 cm
 Excavation depth 80 cm

Order No. 3.63020
Stainless Steel Slide

Excavation depth for ground anchor 55 cm

Single Swing
 2 items 60 x 70 x 40 cm
 Excavation depth 60 cm

Order No. L3.69720
Horizontal Bar

1 item 60 x 60 x 60 cm
 Excavation depth 80 cm

Attention:

**Exact measurements may vary;
 for all installation dimensions refer
 to current assembly instructions.**
 Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure

Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible

Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain

Hardwood rungs

Climbing rungs made of hardwood (ash) Ø 4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch

One-piece construction

Total construction of the slide made of 2 mm stainless steel, drawn in box form, surface glass bead blasted, without welding seam between sliding surface and side cheek

Swing seat

Ergonomically shaped swing seat made of rubber with soft shock absorbing edge. Durable due to strong profiled steel insert

Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel

Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood

Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

Cross beam made of steel

Swing cross beam made of hot-dip galvanized steel. Optimized swing geometry with rigid corner connections, thus allowing for smaller foundations and easier foundation covering

Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten

For more detailed explanation of the quality characteristics see price list.

Firemen's Pole Ø 42 mm made of stainless steel, glass bead blasted

L5.03380

LudoCrea.ch GmbH — 6074 Giswil — +41 41 675 03 67 — info@ludocrea.ch