

### Play value

Children need the possibility of swinging during their development. Swinging to and fro is a basic movement and is fun not only for children. Swinging has a comforting effect, removes tensions and provides pleasure, particularly if swinging is possible side by side.



Special version with square timber



Special version with square timber


### Fundamental characteristics

- Unique and original
- Pendulum tyres on holding poles
- Incentive for playing: swing suspension
- Movement: swinging, swaying

### Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



### Twin Pendulum



L6.42000

**Order No. L6.42000**  
**Twin Pendulum**

Safety distance →  
 Device dimensions ●  
 Functional distance —

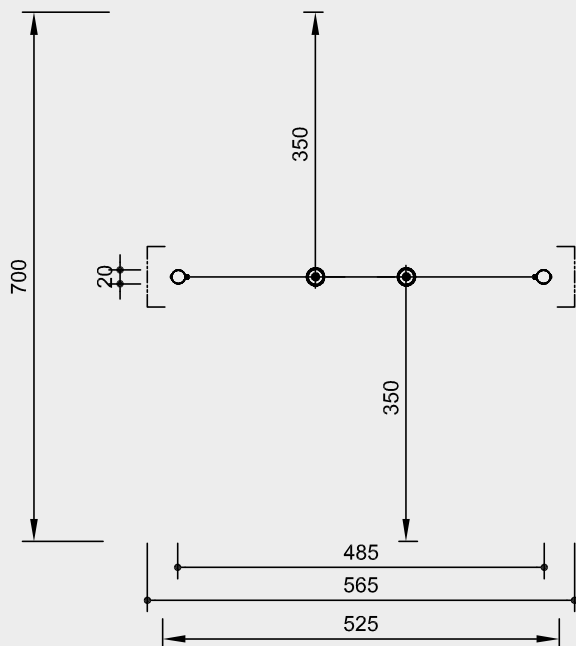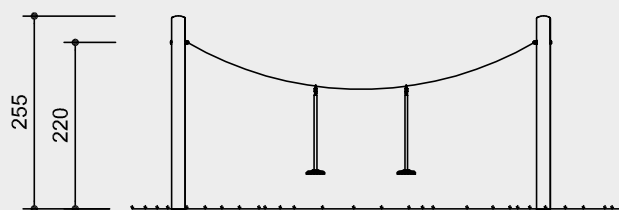

Scale 1:100

Safety check according to DIN EN 1176 and "safety in another way"

**Components**

- 2 Support posts with steel feet
- 1 Rope with 2 pendulum seats

**Installation information**

Surfacing requirements corresponding to a fall height of  $\leq 1.50$  m (please refer to price list for more detailed information)

Foundations  
 2 items 80 x 80 x 60 cm  
 Excavation depth 80 cm

**Attention:**  
 Exact measurements may vary, for all installation dimensions refer to current installation instructions.  
 Technical changes reserved.


**L6.42000**
**Technical information**

Equipment made of non-impregnated mountain larch

**Peeled white**

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced


**Bevel cut**

Vertical stand posts with bevelled end grain section as constructive wood preservation measure


**Pendulum seat**

Pendulum seat with a large rubber surface. Soft, protective edge and steel insert


**Richter Hercules type rope**

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter  $> 20$  mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing


**Aluminium rope pressing**

Aluminium rope pressing, cylindrically pressed, with rounded ends


**S-connectors**

S-connectors  $\varnothing 8.1$  mm, made of high-quality stainless steel, rounded


**Universal joint**

Drop-forged, hot-dip galvanised universal joint, consists of two sintered bushes, for free swinging in any direction


**Profiled washer**

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt


**Sintered bush**

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary


**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel


**Chains**

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten


**For more detailed explanation of the quality characteristics see price list.**

Pendulum seat suspended on sleeved chain

**Dimensions**

(small deviations possible)

Height	2.55 m
Width	4.85 m
Length	7.00 m
Weight	160 kg