Instructions for wear checks of play equipment

Playground

Date of installation


Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on

- location
- kind of use
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

See-saw with shock absorbers Order No. 6.11000/6.11010



r oment	The equipment must be checked for correct operation and safety, especially the points listed below:		Proof of maintenance	
		Wooden parts		
pment. hust atic checks	1.	Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks.		
		See-saw mechanism		
	2.	Check that all bolts and screws are tight and retighten if necessary.		
	3.	Check brass bush for wear and tear, replace if necessary.		
		Shock absorbers		
	4.	Check spring effect of up and down movement; the beam must stop smoothly.		
		Handles		
	5.	Check for stability.		
ers		Structural stability		
9	6.	In order to check the stability of the foundation or the steel feet for corrosion, uncover the foundation once a year.		
				Special notes, e.g. for repairs
		pair not carried out,		S
	it is still possible to play on equipment Repair not carried out, equipment is taken out of action			
		work carried out, erything is in order		
	Ма	intenance carried out by:		

For spare parts refer to back of page.


info@ludocrea.ch

675 03 67

+4141

6074 Giswil

-udoCrea.ch GmbH

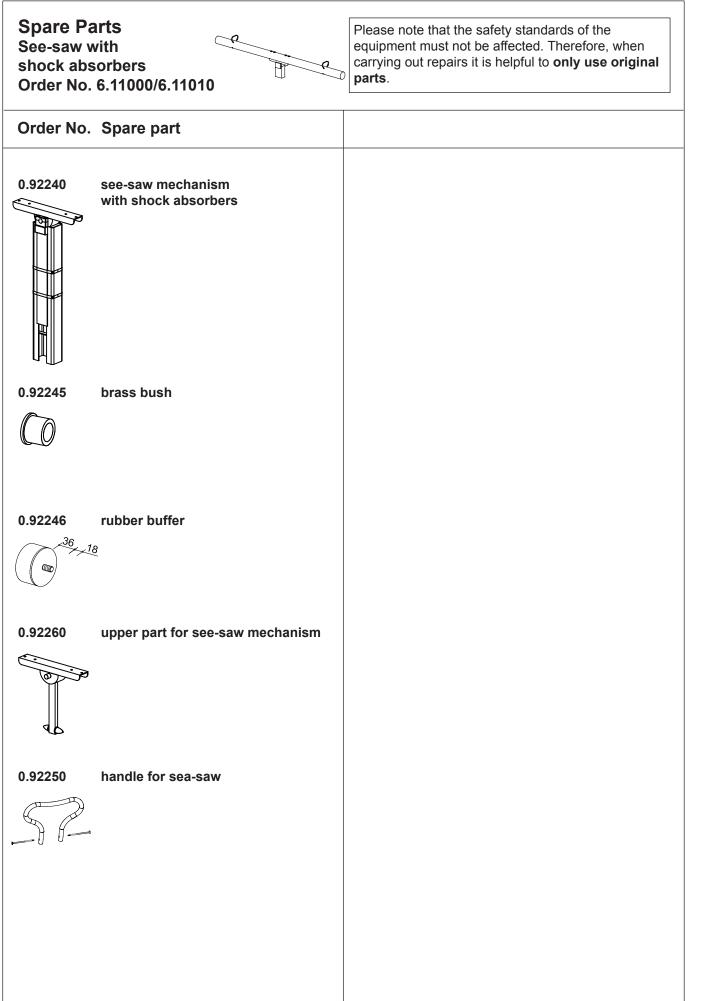

info@ludocrea.ch