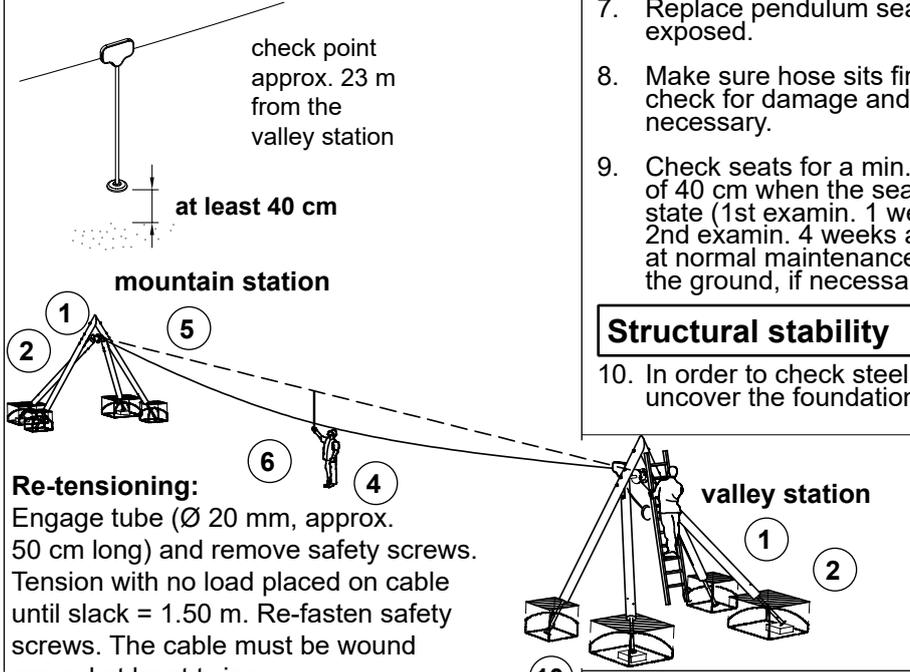
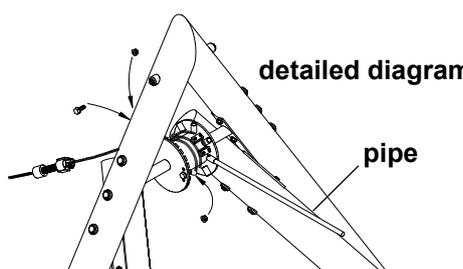





<h1>Instructions for wear checks of play equipment</h1>	<p>The equipment must be checked for correct operation and safety, especially the points listed below:</p>	<p>Proof of maintenance</p>
<p><b>Playground</b>.....</p> <p><b>Date of installation</b> .....</p> <p>Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.</p> <p>Intervals for maintenance work and checks generally depend on</p> <ul style="list-style-type: none"> <li>- location</li> <li>- usage</li> <li>- frequency of use</li> <li>- possible vandalism</li> </ul> <p><b>For more details see also our general instructions for maintenance of playgrounds!</b></p> <p><b>Large Gated Cableway up to 50 m</b> Order No. L6.02100</p>  <p><b>Re-tensioning:</b> Engage tube (Ø 20 mm, approx. 50 cm long) and remove safety screws. Tension with no load placed on cable until slack = 1.50 m. Re-fasten safety screws. The cable must be wound around at least twice.</p>  <p><b>detailed diagram</b></p> <p><b>pipe</b></p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Wooden parts</b></div> <ol style="list-style-type: none"> <li>1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. <input type="checkbox"/></li> <li>2. Check that all bolts and screws are tight and retighten if necessary. <input type="checkbox"/></li> </ol> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Travelling crab</b></div> <ol style="list-style-type: none"> <li>3. Make sure that parts move smoothly and check for damage. <input type="checkbox"/></li> </ol> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Carrying cable / cable connection</b></div> <ol style="list-style-type: none"> <li>4. Check rope for damages and replace if necessary. <input type="checkbox"/></li> <li>5. Check articulated cable connection (mountain station) for wear. <input type="checkbox"/></li> <li>6. Check the slack when <b>no load</b> is placed on the cable by measuring the distance between the line of view and the cable with the assistance of a second person performing the measurement at the check point (= 1.50 m). Re-tension cable according to the sketch. <input type="checkbox"/></li> </ol> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Pendulum seat / hose sleeve</b></div> <ol style="list-style-type: none"> <li>7. Replace pendulum seat if metal parts are exposed. <input type="checkbox"/></li> <li>8. Make sure hose sits firmly on the chain, check for damage and replace if necessary. <input type="checkbox"/></li> <li>9. Check seats for a min. ground clearance of 40 cm when the seats are in a <b>loaded</b> state (1st examin. 1 week after assembly, 2nd examin. 4 weeks after assembly, then at normal maintenance intervals). Adjust the ground, if necessary. <input type="checkbox"/></li> </ol> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Structural stability</b></div> <ol style="list-style-type: none"> <li>10. In order to check steel feet for corrosion, uncover the foundations once a year. <input type="checkbox"/></li> </ol> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Repair not carried out, it is still possible to play on equipment</b></div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>Repair not carried out, equipment is taken out of action</b></div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"><b>All work carried out, everything is in order</b></div> <p><b>Maintenance carried out by:</b></p> <p>..... <b>Date</b> .....</p>	<p style="text-align: center;">Special notes, e.g. for repairs</p>

En-EN 29.08.2023

COPYRIGHT © RICHTER SPIELGERÄTE GMBH

LudoCrea.ch GmbH — 6074 Giswil — +41 41 675 03 67 — info@ludocrea.ch

<p><b>Spare parts</b>  <b>Large Gated Cableway up to 50 m</b>  <b>Order No. L6.02100</b></p> 		<p>Please note that the safety standards of the equipment must not be affected. Therefore, when carrying out repairs it is helpful to <b>only use original parts</b>.</p>	
<b>Order No.</b>	<b>Spare parts</b>	<b>Order No.</b>	<b>Spare parts</b>
0.95000	<p>Pendulum seat with suspension chain length 1.50 m</p> 	0.95051	<p>Stopper spring for mountain station</p> 
0.94110	<p>Pendulum seat without disc</p> 	0.95052	<p>Stopper spring for valley station</p> 
0.94120	<p>Disc</p> 	0.95015	<p>Wear buffer for travelling crab</p> 
0.95080	<p>Carrying cable 54 m with 2 hose sleeve segments</p> 	0.95012	<p>Travelling crab</p> 