



Special version



Special version

Play value

The Castle Tower looks just like an old fortified tower and is a meeting point for older children and young people. It is crowned with a battlement and can be combined with other equipment. It can be combined particularly well with slides but other combinations are also possible. A ladder leads up to a two-metre-high floor, topped with a castle flag. A round bench in the lower area is an inviting place to sit for a while. With its striking appearance, the Castle Tower has a signal effect and lends a special atmosphere to every playground.

Fundamental characteristics

- Unique and original
- Striking appearance
- Eye-catcher
- Observation slits
- Agreeable design

Recommended for

- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar



Special version with slide




Castle Tower



3.22000

Order No. 3.22000
Castle Tower

Safety distance →
Device dimensions —●—
Functional distance —|—

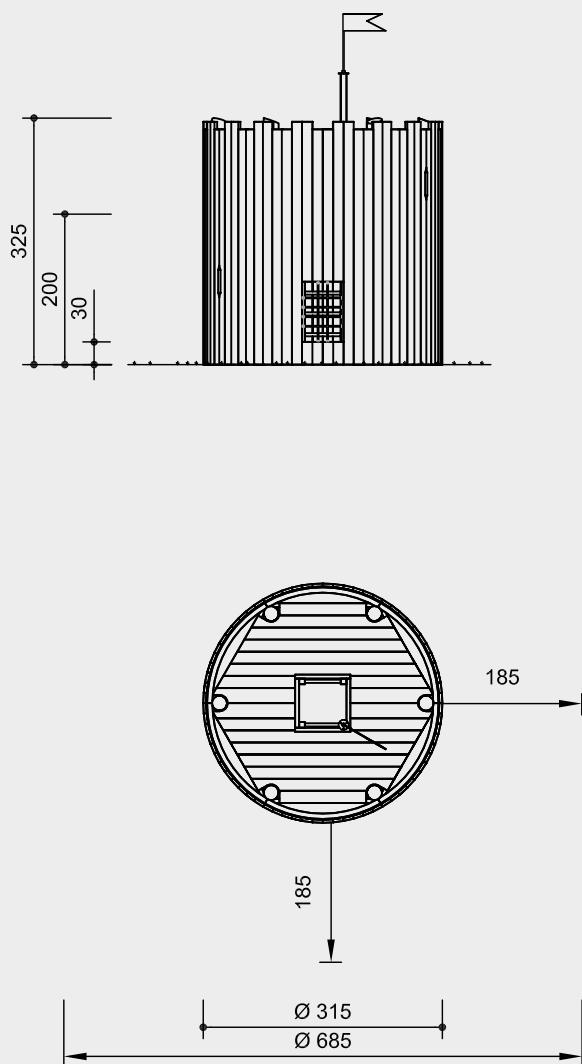

Scale 1:100

Safety check according to DIN EN 1176

Components

- 3 Support frames
- 2 Floor halves
- 1 Ladder with flag
- 6 Facade elements
- 2 Rope windows

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations
6 items 60 x 60 x 60 cm
Excavation depth 80 cm
4 items 30 x 30 x 30 cm
Excavation depth 50 cm

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Hardwood rungs

Climbing rungs made of hardwood (ash) Ø 4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch



Hercules rope

Hercules rope, for spliced net connections. A compound of steel rope for the core and polyester or polyamide yarn for the sheath. High abrasion resistance, 4 or 6 strands



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel




For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Height	3.25 m
Floor height	2.00 m
Diameter	3.15 m
Weight	1500 kg



3.22000