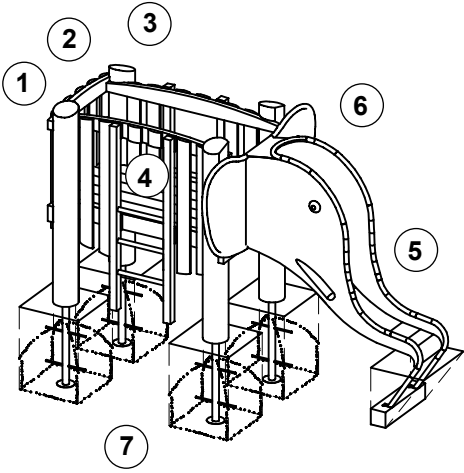


Instructions for wear checks of play equipment	The equipment must be checked for correct operation and safety, especially the points listed below:	Proof of maintenance	
Playground..... Date of installation Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year. Intervals for maintenance work and checks generally depend on - location - usage - frequency of use - possible vandalism For more details see also "General instructions for maintenance of playgrounds". Small Elephant with Trunk Slide Order No. 4.08600 	Wooden parts 1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐ 2. Check all bolts and screws are tight and retighten if necessary, retighten if necessary ☐ 3. Recommendation: apply paraffin wax to the upper end grain areas once a year, please refer to order No. 0.90100, 1 litre. ☐ 4. Check the ash wood rungs of the ladders for wear and tear, the remaining diameter must be at least 30 mm. ☐ Slide 5. Check the slide surface for vandalism. ☐ 6. Check that the bolts and screws on the platform are tight and retighten if necessary. ☐ Structural stability 7. Uncover the foundation once a year in order to check for rot or corrosion. ☐	Special notes, e.g. for repairs	
	Repair not carried out, it is still possible to play on equipment		
	Repair not carried out, equipment is taken out of action		
	All work carried out, everything is in order		
Maintenance carried out by: Date			