



### Play value

For children, playing does not always mean doing something active. Playing might just as well mean being there. For these play phases it is necessary to provide seats or places, especially raised seating. Our Sitting Fence allows „hanging about“ casually, provides a good view and one can talk with the others feeling very „cool“: The fence seat is developed in such a way that it fits well when installed in groups, so that the planner can individually design the intended location.

### Fundamental characteristics


- Natural wooden surface with big diameters provides comfortable seating
- Appealing design
- Movement: sitting, balancing

### Recommended for


- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



**Sitting Fence**



7.85001 - 7.85031

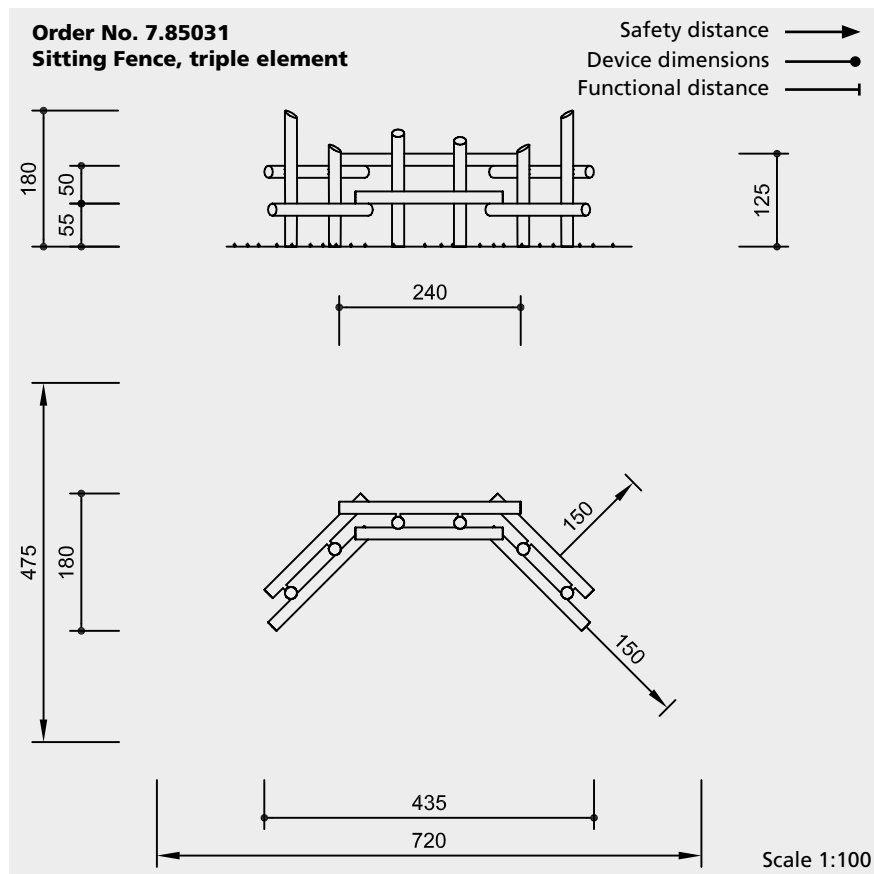

Safety check according to DIN EN 1176

## Components

### Order No. 7.85001 Sitting Fence, single element

- 2 Posts with 2 steel feet
- 2 Cross beams

### Order No. 7.85021 Sitting Fence, double element

- 4 Posts with 4 steel feet
- 4 Cross beams

### Order No. 7.85031 Sitting Fence, triple element

- 6 Posts with 6 steel feet
- 6 Cross beams

## Installation information

Surfacing requirements corresponding to a fall height of  $\leq 1.50$  m (please refer to price list for more detailed information)

Foundations  
Per post 1 item 60 x 60 x 50 cm  
Excavation depth 70 cm

**Attention:**  
Exact measurements may vary, for all installation dimensions refer to current installation instructions.  
Technical changes reserved.

## Technical information

Equipment made of non-impregnated mountain larch

### Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



### Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



### Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



### Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



### Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



### Distance fitting

Screw connection with distance fitting to avoid entrapment areas



### Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



**For more detailed explanation of the quality characteristics see price list.**

## Dimensions

(small deviations possible)

### Order No. 7.85001

#### Sitting Fence, single element

Height	1.50 m
Width	2.40 m
Weight per element	130 kg

### Order No. 7.85021


#### Sitting Fence, double element

Height	1.80 m
Width	3.50 m
Weight	260 kg

### Order No. 7.85031

#### Sitting Fence, triple element

Height	1.80 m
Width	4.35 m
Weight	390 kg



7.85001 - 7.85031