

Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground.....

Date of installation


Checks depend on the type of equipment.
Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on

- location
- usage
- frequency of use
- possible vandalism

For more details see also our general instructions for maintenance of playgrounds!

Topsy-Turvy Tree House
Order No. 8.81000

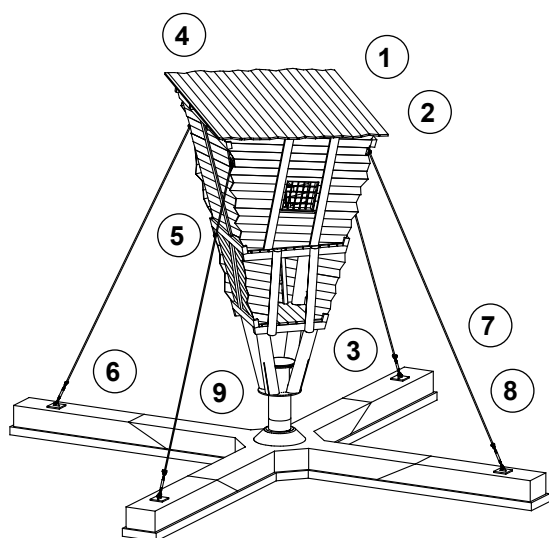

Wooden parts

1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks. ☐
2. Check that all bolts and screws are tight and retighten if necessary. ☐
3. Check the ash wood rungs of the ladders for wear and tear, the remaining diameter must be at least 30 mm. ☐
4. **Recommendation:** apply paraffin wax to the upper end grain areas once a year, please refer to Order No. 0.90100, 1 litre. ☐

Metal parts and fittings

5. Filedownanysharpedgesthatmayarisefrom wear and tear. ☐
6. Make sure that the swivels move smoothly, check for wear and tear, apply small amount of grease if required. ☐

Ropes

7. Check ropes for wear and tear, must be replaced if worn heavily. ☐
8. Check connections. ☐

Structural stability

9. In case of anchoring to the ground check pylon for structural stability. ☐

Special notes, e.g. for repairs

Repair not carried out,
it is still possible to play on equipment ☐

Repair not carried out,
equipment is taken out of action ☐

All work carried out,
everything is in order ☐

Maintenance carried out by:

..... Date